

Lever Handles Stainless Steel Grade 304

1



Stainless Steel Grade 304:

Stainless steel to EN standard No. 1.4301
ASTM/AISI 304. 18% chromium 8% nickel

Spindle type

- ☐ Plain spindle
- ☐ Piercing spindle
- ☐ Slotted spindle
- ☐ Stabil spindle

See page 64 for details

Compatibility rating



For full explanation see page 2


All FSB lever handles on this page suit door thickness 42-46 mm. For other door thickness please consult our sales office, as they are to special order only, subject to quantity

A FSB 1021 lever handles

- Pair of lever handles
- Grub screw fixing on 8 mm spindle
- Pair of concealed fixing roses (order separately)
- **Unsprung**, for use with **heavy duty** followers
- Fixings not included. See page 36, item C
- To suit doors **42-46 mm** thick
- 304 stainless steel
- Matching escutcheons available, see page 192
- Fixed spindle, see page 64 for details of type
- For sprung roses, see page 37
- For recommended locks, see Section 2 pages 4-14

Item	Finish	Cat. No.
Lever handle	Satin stainless steel	902.20.200
Handle rose	Satin stainless steel	902.50.000

Order qty: 1 pair

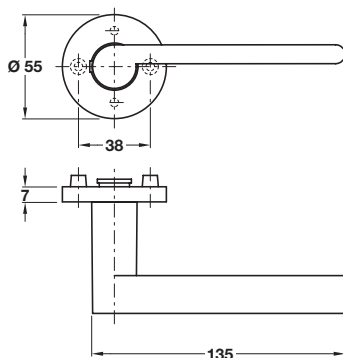

Satin stainless steel finish



FSB



D FSB 1021 Lever handle set

- Includes 1 pair handles and roses
- Fixings included for 42-46 mm thick doors

Finish	Cat. No.
Satin stainless steel	902.20.842


Order qty: 1 set

B FSB 1023 lever handles

- Design: Johannes Potente
- Pair of lever handles
- Grub screw fixing on 8 mm spindle
- Pair of concealed fixing roses (order separately)
- **Unsprung**, for use with **heavy duty** followers
- Fixings not included. See page 36, item C
- To suit doors **42-46 mm** thick
- 304 stainless steel
- Matching escutcheons available, see page 192
- Fixed spindle, see page 64 for details of type
- For sprung roses, see page 37
- For recommended locks, see Section 2 pages 4-14

Item	Finish	Cat. No.
Lever handle	Satin stainless steel	902.20.220
Handle rose	Satin stainless steel	902.50.000

Order qty: 1 pair

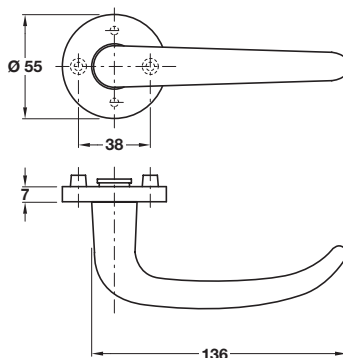

Satin stainless steel finish



FSB




C FSB 1025 lever handles

- Pair of lever handles
- Grub screw fixing on 8 mm spindle
- Pair of concealed fixing roses (order separately)
- **Unsprung**, for use with **heavy duty** followers
- Fixings not included. See page 36, item C
- To suit doors **42-46 mm** thick
- 304 stainless steel
- Matching escutcheons available, see page 193
- Fixed spindle, see page 64 for details of type
- For sprung roses, see page 37
- For recommended locks, see Section 2 pages 4-14

Item	Finish	Cat. No.
Lever handle	Satin stainless steel	902.20.470
Handle rose	Satin stainless steel	902.50.050

Order qty: 1 pair

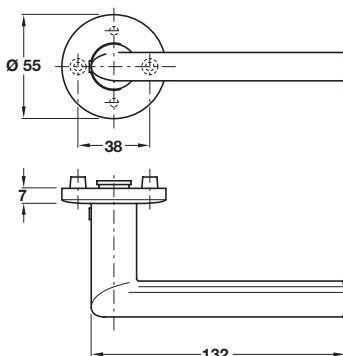

Satin stainless steel finish



FSB



05.04.13/1