



Stainless Steel Grade 304:


Stainless steel to EN standard No. 1.4301
ASTM/AISI 304. 18% chromium 8% nickel

Spindle type

-  Plain spindle
-  Piercing spindle
-  Slotted spindle
-  Stabil spindle

See page 64 for details

Compatibility rating



For full explanation see page 2


All FSB lever handles on this page suit door thickness 42-46 mm. For other door thickness please consult our sales office, as they are to special order only, subject to quantity

A FSB 1144 lever handle

- Pair of lever handles
- Grub screw fixing on 8 mm spindle
- Pair of concealed fixing roses (order separately)
- **Unsprung**, for use with **heavy duty** followers
- Fixings included
- To suit doors **42-46 mm** thick
- 304 stainless steel
- Matching escutcheons available, see page 192
- Fixed spindle, see page 64 for details of type
- For sprung roses, see page 37
- For recommended locks, see **Section 2** pages 4-14

Item	Finish	Cat. No.
Lever handle	Satin stainless steel	902.20.244
Handle rose	Satin stainless steel	902.50.000

Order qty: 1 pair

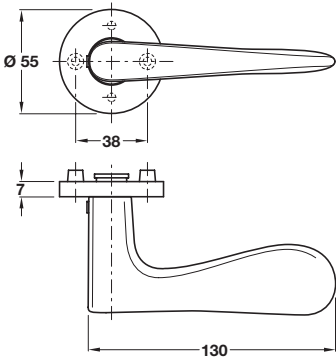

Satin stainless steel finish



FSB



B FSB 1144 Lever handle set

- Includes 1 pair lever handles and roses
- Fixings included for 42-46 mm thick doors

Finish	Cat. No.
Satin stainless steel	902.20.892

Order qty: 1 set

TCH-AI 2008, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.