

1



Spindle type

- Plain spindle
- Piercing spindle
- Slotted spindle
- Stabil spindle

See page 64 for details

Compatibility rating



For full explanation see page 2


All FSB lever handles on this page suit door thickness 42-46 mm. For other door thickness please consult our sales office, as they are to special order only, subject to quantity

A FSB 1119 lever handle

- Designer: Hartmut Weise
- Pair of lever handles
- Grub screw fixing on 8 mm spindle
- Pair of concealed fixing roses (order separately)
- **Unsprung**, for use with **heavy duty** followers
- For sprung roses, see page 98
- Fixings included
- To suit doors **42-46 mm** thick
- Aluminium
- Matching escutcheons available, see page 211
- Fixed spindle, see page 64 for details of type
- For recommended locks, see **Section 2** pages 4-14

Lever handle	Cat. No.
Silver anodised	904.20.941
Handle rose	
Silver anodised	904.50.011

Order qty: 1 pair

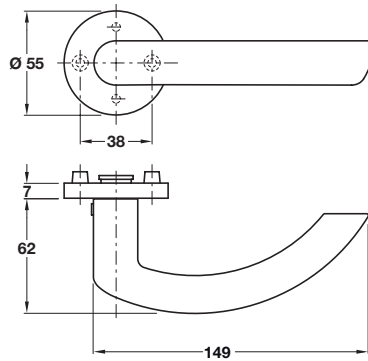

Silver anodised finish



FSB




B FSB 1144 lever handles

- Pair of lever handles
- Grub screw fixing on 8 mm spindle
- Pair of concealed fixing roses (order separately)
- **Unsprung**, for use with **heavy duty** followers
- For sprung roses, see page 98
- Fixings included
- To suit doors **42-46 mm** thick
- Aluminium
- Matching escutcheons available, see page 210
- Fixed spindle, see page 64 for details of type
- For recommended locks, see **Section 2** pages 4-14

Lever handle	Cat. No.
Silver anodised	904.20.141
Handle rose	
Silver anodised	904.50.001

Order qty: 1 pair

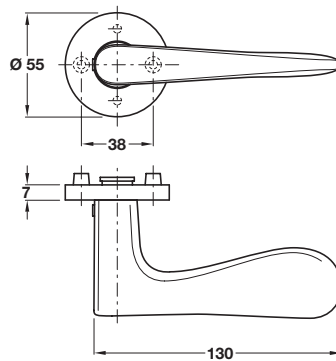

Silver anodised finish



FSB



D FSB 1144 Lever handle set

- Includes 1 pair handles and roses
- Fixings included for 42-46 mm thick doors

Finish	Cat. No.
Satin anodised	904.21.191


Order qty: 1 set

C FSB 1147 lever handles

- Pair of lever handles
- Grub screw fixing on 8 mm spindle
- Pair of concealed fixing roses (order separately)
- **Unsprung**, for use with **heavy duty** followers
- For sprung roses, see page 98
- Fixings included
- To suit doors **42-46 mm** thick
- Aluminium
- Matching escutcheons available, see page 210
- Fixed spindle, see page 64 for details of type
- For recommended locks, see **Section 2** pages 4-14

Lever handle	Cat. No.
Silver anodised	904.20.161
Handle rose	
Silver anodised	904.50.001

Order qty: 1 pair

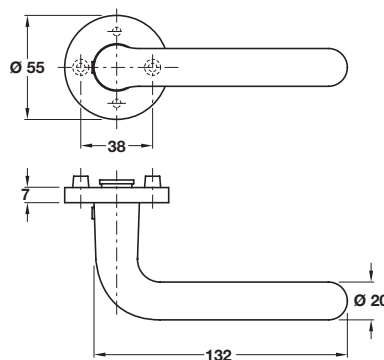

Silver anodised finish



FSB



05.04.13/1