

# Fittings for Sliding Folding Cabinet Doors/Partitions

## HAWA-Multifold 30 Floating

**L Sealing profile strip.** To cover centre gap. Press-fits into 2.5 mm groove. Rubber

Colour	White	Black
Cat. No.	409.54.700	409.54.300

Order qty: 1 roll (5.0 m length)

**M Folding panel connecting fitting**

For joining 2 panels. Nickel-plated steel

Cat. No.	409.50.930
----------	------------

Order qty: 1 pair

**N Panel interlocking fitting.** Black plastic

Cat. No.	409.50.940
----------	------------

Order qty: 1 pair

**O Drilling template.** For guides and suspension unit

Cat. No.	409.50.990
----------	------------

Order qty: 1 pc

**P Safety fitting.** Black powder coated steel

Cat. No.	271.98.100
----------	------------


Order qty: 1 pc

### Additional track and channel stoppers




Item	Cat. No.
<b>H</b> Track stopper	409.52.900
<b>I</b> Channel stopper	409.52.910

Order qty: 1 pc


**Optional extras: (Extending rod locks are also available. Details on request)**

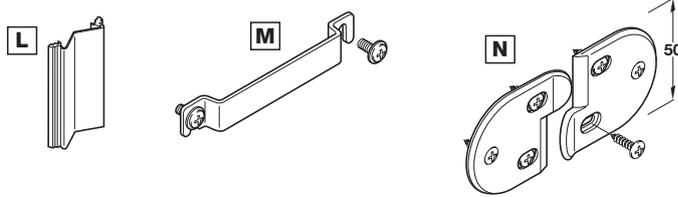

**Note:** When all door panels are opened and pushed to one side, there is the danger of the cabinet tipping over, to prevent this use this safety fitting to anchor the unit to a back wall

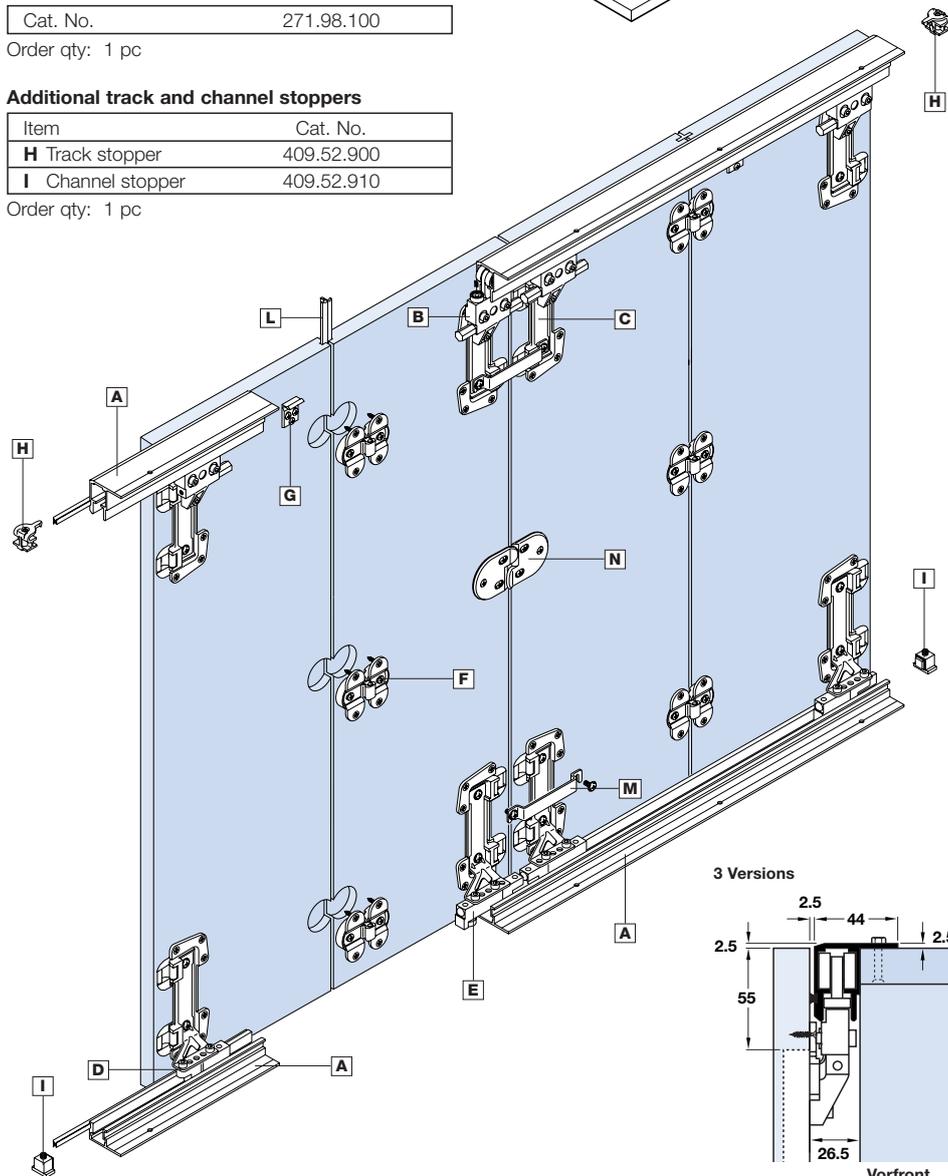

Adjustable concealed centre hinge F is sprung to hold a pair of doors in either an open or closed position

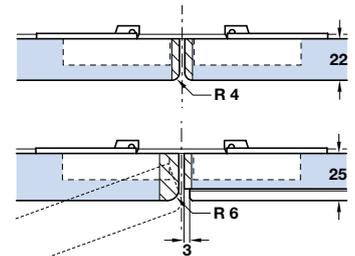

For door thickness 20+ mm, edges must be radiused

### 3 Versions

