


Multi switch box


1



Häfele Loox multi switch box

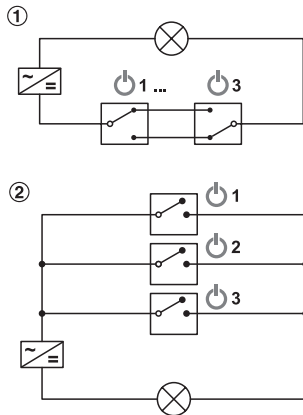

- ① Cross circuit
② Deactivated cross circuit

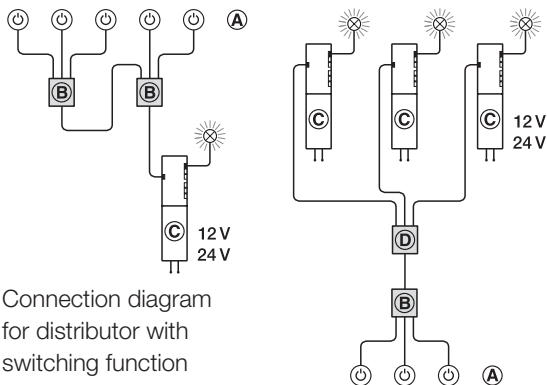

Connection diagram
for distributor with
switching function

Combination of 2 multi-
switch boxes

- (A) Switch
(B) Multi switch box
(C) Driver

Connection diagram
for distributor with
switching function

Combination of multi
switch box and multi
driver box

- (A) Switch
(B) Multi switch box
(C) Driver
(D) Multi driver box

Cannot be used in
combination with Loox
dimmers

- > 1 LED driver/distributor with switching function operated by up to 3 switches
- > Allows the LED driver or distributor with switching function to be switched on and off from different positions

- > Version: 1 driver/distributor with up to 3 switches can be switched using the switching function
- > Functionality: 2 operating modes can be selected using an integrated toggle switch.
Cross circuit: On/off switching at alternating switches.
Deactivated cross circuit: Switching on with switch 1, 2 or 3.
For switching off, all switches that were switched on have to be operated again.
- > Operation mode: With cross circuit, deactivated cross circuit
- > Material/colour: Plastic, black
- > Length x width: 55 x 45 mm
- > Height: 16 mm
- > Max. standby power consumption: 0.3 W
- > Degree of protection: IP20
- > Supplied with: 1 multi switch box
With 1 m lead for switch

Control input ports	Control output ports	Cat. No.
1x socket, Loox switch	3x sockets, Loox switch	833.89.036

! 2 multi-switch boxes can be combined and used with 5 switches

+ Please order lead for switch with other lengths separately, see on page ► 1.156