



For further information on **BS EN 1125**, please refer to the Standards pages shown at the back of this catalogue

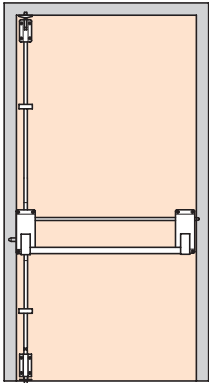

BS EN 1125:1997 A1:2001



A Heavy duty security panic bolt

- Suitable for single outward opening timber and steel doors only
- To suit doors up to 2440 mm high x 1220 mm wide
- Suitable for either hand
- Four point locking
- 19 mm bolt throw
- Tested and approved to BS EN 1125
- CE conformant
- Suitable for use on fire doors

Features

- Four point locking
- Anti-thrust on bottom shoot
- Steel bolts and mechanism
- Adjustable shoots at top and bottom
- Automatic top trip for auto locking
- Supplied complete with standard keeps
- Fixing template included
- Successfully used in a Burglary Resistance Test LPS 1175 Level 4
- Mild steel, epoxy powder coated
- The below variations are available to special order, subject to quantity:
 - 30 mm throw unit
 - Two and three point
 - Steel door units
 - Lever operated for Emergency Escape (BS 179), handed
 - Multi-bolt units
 - Stainless steel finish
- For external access devices and security locking box to suit, please refer to page 56

Finish	Cat. No.
Grey (RAL 7016)	911.52.630

Order qty: 1 set

Re-instated

