

Overhead Door Closer TS 1500

HÄFELE


BS EN 1154



Note: TS 1500 door closer can be used to assist a door set to meet the Doc 'M' opening force requirements



Silver finish

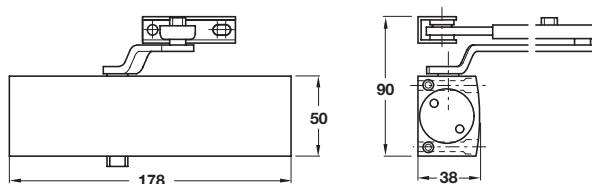

Closing force

Size	Max. door width	Min. closing moments
3	950 mm	18 Nm
4	1100 mm	26 Nm




Fig 1 Standard application
Closer is fixed to the pull side of the door




Fig 61 Transom application
Closer is fixed to the push side of the door (overhead installation)




Fig 66 Parallel arm application
Closer is fixed to the push side of the door using fixing bracket

A TS 1500 overhead door closer

- **Specification:**
Surface mounted rack and pinion door closer with flat form arm for doors up to 1100 mm with adjustable closing force and latching action
- **Features:**
Rack and pinion
Flat form arm
Closing force by power shoe (size EN 3-4)
Adjustable closing speed and latching action
- **Models**
Fig 1, Fig 61 and Fig 66
- **Options** (see page 24 for details)
Hold open arm
Fig 1 architrave bracket
- **Certification**
Tested and approved to BS EN 1154: 1997 and BS EN 1634
Tested to conform with CE requirements
Certifire approved; certifire no. CF144
120 mins timber
- **Materials:**
Aluminium body, mild steel arm
Electro-plated mild steel cover* (not suitable for external use)

Item A.
Text amended

TS 1500: Fig 1/61/66

Finish	Cat. No.
Silver	940.01.626
Gold	940.01.628
Black	931.16.603
Satin stainless steel*	931.16.850
Polished stainless steel*	931.16.852
Polished brass*	931.16.858

Order qty: 1 pc

6