- Application: Heavy-duty version of Combino 20/35 Mixfront for general purpose straight sliding doors. Normal inset top track plus extra robust concealed bottom guiding. Ideal for commercial applications, not suitable for metal door applications. **Designed mainly for furniture** manufacturers and volume users
- Range: Max. door panel weight 60 kg Max. door height 2400 mm Max. door width 1400 mm For door thickness 19-27 mm, recommended door thickness 25 mm
- Running gear: Back fixing steel body with plastic tyred, ball bearing mounted rollers, $\pm\ 3$ mm adjustment using allen key
- Fittings: Supplied only in 2 and 3 door packs with tracks supplied separately
- Top track A and bottom guide rail c are not included and must be ordered separately
- SW4, Ø 4.5 x 16 mm screws are included in the fitting sets
- For multiple door layouts, order as follows:

4 doors: 2 sets of 2 door fittings

5 doors: 1 set each of 2 and 3 door fittings

For ancillary door hardware i.e. locks, handles and bolts etc. refer to page 19

A Double top track

With screw holes, soffit fixing. Bright aluminium

Length	2.5 m	3.5 m
Cat. No.	405.70.025	405.70.035

Order qty: 1 pc (2.5 or 3.5 m length)

B Fascia clip

Clips onto track A, every 700-800 mm. Pre-drilled for attaching wooden fascia. Bright aluminium

Order qty: 1 pc

C Double bottom guide rail

With screw holes. Bright aluminium

Length	2.5 m	3.5 m
Cat. No.	401.57.025	401.57.035

Order qty: 1 pc (2.5 or 3. m length)

Combino 60 H Mixfront fitting sets

- D Track stopper, for top track, with spring. Grey plastic with rubber buffer and galvanized steel spring retention catch.
- E Track stopper, for top track, without spring. Grey plastic with rubber buffer
- Running gear, single roller, back fixing. Galvanized steel body with plastic tyred, ball bearing mounted roller
- G Bottom guide, for outer door, with spring loaded pin. Galvanized steel
- H Bottom guide, for inner door, with spring loaded pin. Galvanized steel
- I Buffer stop, for bottom guide rail. Galvanized
- J Door buffer, screw fixes to front edge of door. Galvanized steel with black rubber buffer

Fitting sets for	2 doors	3 doors
D Stopper, with spring	2 pcs	3 pcs
E Stopper, without sprin	g 2 pcs	1 pc
F Running gear	4 pcs	6 pcs
G Guide, for outer door	2 pcs	2 pcs
H Guide, for inner door	2 pcs	4 pcs
 Buffer stop 	4 pcs	4 pcs
J Door buffer	1 pc	2 pcs
Cat No.	405 71 221	405 71 231

Order qty: 1 set (order 1 set per 2 or 3 door application)

ļ	ט	Additional	track	stopper,	with	spring	
	С	at. No.			405	.74.110	

Order qty: 1 pc


TCH-AI 2008, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.

K Centre door stopper

For three door applications. Allows outer door to slide either to the right or to the left. Self coloured plastic stopper with nickel-plated steel spring

	Cat. No.	406.32.080
7	S	

Order qty: 1 pc

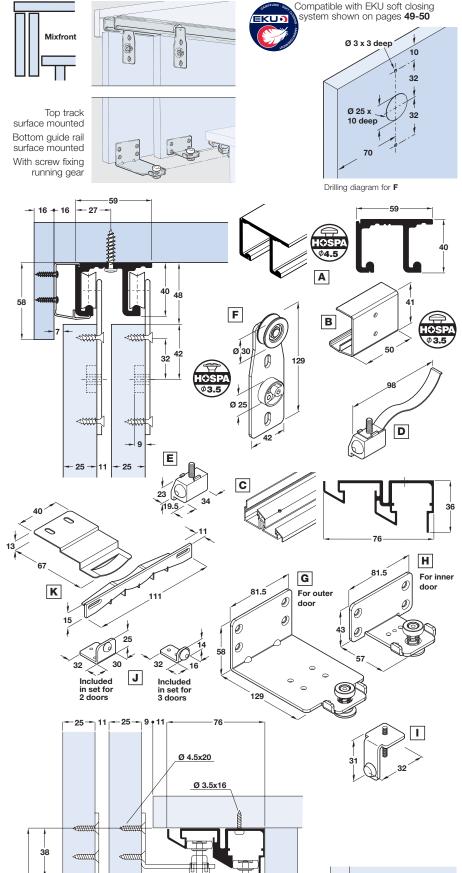

10

Drilling diagram for **G/H**

Min. 110