



Single sided vac-clamp



Double sided vac-clamp



Switch

Tee piece



A Vac-clamp

- For use as a holding mechanism for parts with at least one flat side, while using a router, sander, circular saw or jigsaw
- Suitable for holding non-porous materials such as glass, plastic, wood, steel, aluminium and melamine
- Dims (L x W x H): 200 x 160 x 22 mm
- Air consumption (@ 0.6 Pa): 23NI/min (ANR)
- Holding force: Better than 800 g/cm²
- PE/Nylon

Item	Cat. No.
Single sided vac-clamp	● 008.31.000
Double sided vac-clamp	+ 008.31.001
Switch	+ 008.31.008
Tee piece	+ 008.31.009

Order qty: 1 pc




B Heavy duty T-bar sash clamp

- Bar dimensions: 40 x 40 x 50 mm
- Jaw dimensions: 66 x 43 mm
- Locking bar and Tommy bar included

Opening	Cat. No.
1000 mm	003.75.230
1500 mm	003.75.232
2000 mm	003.75.234

Order qty: 1 pc

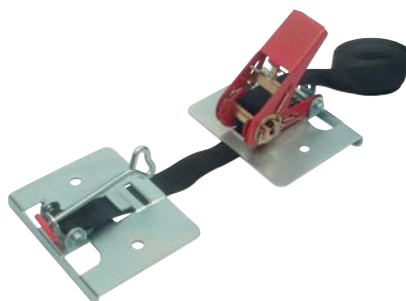

C Flooring clamp

- For laying laminate floors
- Opening: 4000 mm
- Capacity width: 120 mm

	Cat. No.
Flooring clamp	003.71.671

Order qty: 1 pc



D Band clamp

- Capacity: 7 m/23 ft
- Strap width: 25 mm
- Angle: 60° - 180°

	Cat. No.
Band clamp	003.73.255

Order qty: 1 pc



E DuoKlamm

- For one handed clamping and spreading. Switch from opening to spreading with the turn of a dial
- Pump handle parallel to jams
- 1200 Nm of clamping pressure
- ABS superpolyamide head with soft pads, all steel rail

Opening	Cat. No.
300 mm	003.71.840
450 mm	003.71.841
650 mm	003.71.842

Order qty: 1 pc