HAFELE


- **Application**: Heavy-duty version of Combino 20/35 for general purpose top hung straight
- sliding inset cupboard doors of timber or metal construction


 Range:Max. door panel weight 60 kg
 - Max. door height **2600 mm**Max. door width **1400 mm**For door thickness **19-27 mm**,
- recommended door thickness **25 mm Trolley hangers**: Top and back fixing; steel
- body with plastic tyred, ball bearing mounted wheels. Back fixing version ± 3 mm adjustment using allen key, SW6
- Important note: For extra robustness or where more than three panels on parallel tracks are used, continuous floor channels with guides are recommended (Details on request)




Top track surface mounted No groove in floor Lower profile groove mounted in door With screw fixing

running gear





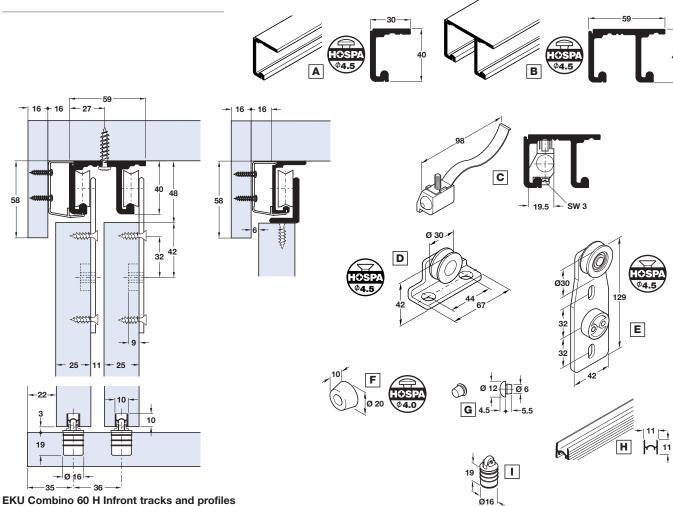

H Bottom guide profile

TCH 2013, @ Häfele U.K. Ltd 2013. Dimensional data not binding. We reserve the right to alter specifications without notice.

Item

A Top track

B Double top track

EKU Combino 60 H Infront fittings				
Item	Description	Base material and finish	Order qty per door	Cat. No.
C Track stopper	for top track	Grey plastic with rubber buffer	2 pcs/4 pcs*	405.74.110
D Trolley hanger, top fixing	single roller, for metal doors	Galvanized steel	2 pcs	405.76.320
E Trolley hanger, back fixing	single roller, not for metal doors	Galvanized steel	2 pcs	405.75.200
F Rubber buffer	screw fixing	Black rubber	2 pcs	407.01.930
or G Rubber buffer	plug-fit	Grey rubber	2 pcs	406.24.101
■ Bottom roller guide	spring loaded, for mounting in drilled holes	Grey plastic	2 pcs	405.04.040

Base material and finish

Bright aluminium

Bright aluminium

Bright aluminium

Order 2 pcs per door length of single track, 4 pcs per length of double track*

Description

for glue mounting

with screw holes for soffit fixing

with screw holes for soffit fixing

3.5 m

405.69.035

405.70.035

405.04.350

2.5 m

405.69.025

405.70.025

405.04.250