
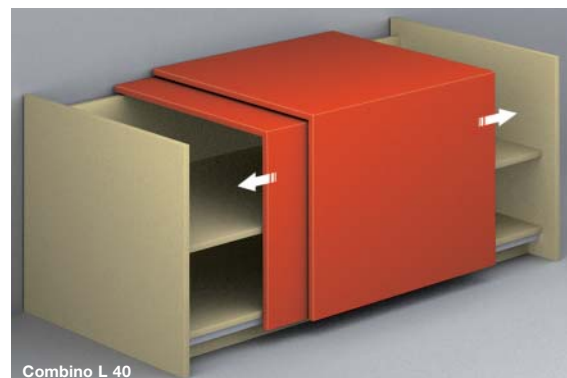


# Fittings for Straight Sliding Timber Cabinet Doors

## EKU Combino L 40

- **EKU Combino L 40**
- **Application:** For 1, 2 or 3 overlay L-shaped sliding doors, which slide over the carcass and open at 2 sides; front and top. Concealed fittings and tracks. Ideal for custom-designed or multimedia furniture.
- **Range:** Max. door panel weight **40 kg**  
For door thickness **19 mm**  
Max. panel height **1500 mm\***  
Max. panel width **1500 mm**  
Max. panel depth (L shape) **700 mm**
- **\*Note:** For door heights more than 800 mm we recommend a door straightening fitting is used.
- **Top guide rail and bottom track must be ordered separately**
- Order adaptor **I** separately if used in combination with **EKU soft closing system**
- **Max. panel height, if EKU soft closing system is used, increases to 2000 mm**
- Fixing materials and installation instructions included



For ancillary door hardware i.e. locks, handles and bolts etc. refer to page 23

**A Double top guide rail.** With screw holes, side fixing. Silver coloured anodised aluminium.

Length	2.5 m	3.5 m
Cat. No.	403.32.925	403.32.935

Order qty: 1 pc (2.5 or 3.5 m length)

**B Double bottom track.** With screw holes, soffit fixing. Silver coloured anodised aluminium.

Length	2.5 m	3.5 m
Cat. No.	403.32.925	403.32.935

Order qty: 1 pc (2.5 or 3.5 m length)

### EKU Combino L 40 fitting sets

- C Top guide plate, for outer door, with roller.** Excentric screw allows  $\pm 3$  mm depth adjustment. Galvanized steel with plastic tyred roller.
- D Top guide plate, for inner door, with roller.** Excentric screw allows  $\pm 3$  mm depth adjustment. Galvanized steel with plastic tyred roller.
- E Guide stopper, for top guide rail.** Galvanized steel with rubber buffer.
- F Rubber buffer, plug fits into edge of door if 3 sliding doors fitted.** Black rubber.
- G Track stopper, for bottom track, with spring.** Galvanized steel with rubber buffer and steel spring retention catch.
- H Track stopper, for bottom track, without spring.** Galvanized steel with rubber buffer.
- I Running gear, for outer door.** Height adjustable  $+4/-2$  mm. Galvanized steel body with plastic tyred, ball bearing mounted roller.
- J Running gear, for inner door.** Height adjustable  $+4/-2$  mm. Galvanized steel body with plastic tyred, ball bearing mounted roller.
- K Follower, for second and third door panel.** White plastic.

Fitting sets for	1 door	2 doors	3 doors
<b>C</b> Guide plate	-	2 pcs	2 pcs
<b>D</b> Guide plate	2 pcs	2 pcs	4 pcs
<b>E</b> Guide stopper	2 pcs	4 pcs	4 pcs
<b>F</b> Rubber buffer	-	-	3 pcs
<b>G</b> Stopper, sprung	2 pcs	2 pcs	3 pcs
<b>H</b> Stopper	-	2 pcs	1 pc
<b>I</b> Running gear	-	2 pcs	2 pcs
<b>J</b> Running gear	2 pcs	2 pcs	4 pcs
<b>K</b> Follower	-	1 pc	2 pcs
Cat. No.	403.31.000	403.31.001	403.31.002

Order qty: 1 set

