











Fittings for Straight Sliding Timber Cabinet Doors

Hush Top Hung Door Fittings

- **Application:** Simple glide based system for light/medium duty sliding cupboard doors, giving a smooth and quiet sliding action
- **Range:** Max. door weight **9 kg**
Max. door height **1800 mm**
Max. door width **900 mm**
- **Recommended door construction:**
Door thickness **12-20 mm**
Usually for solid doors
Width of door not less than half height
- **Fixing:** Top track soffit fixed. Individual tracks allow for variation of door thickness. Bottom guides may be recessed or surface fixed. Position sliders near edge of door

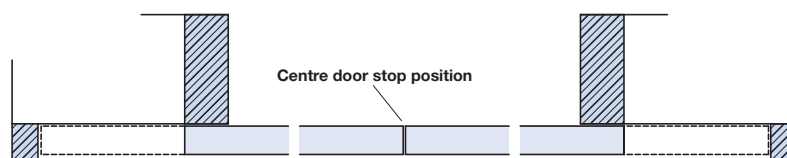

Two doors - one sliding to each side of opening, both doors on a single track

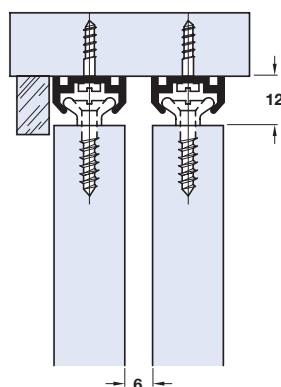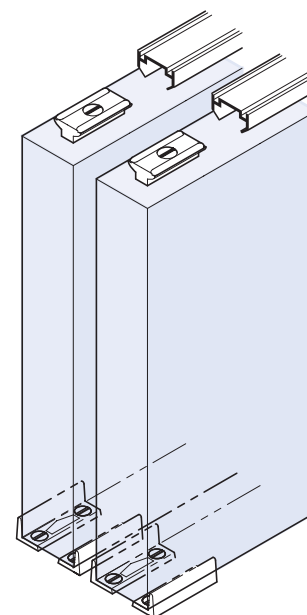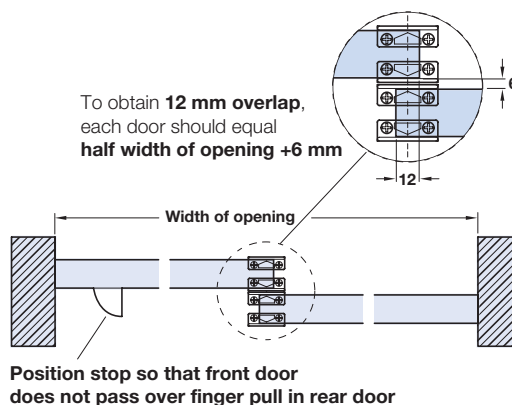

Item	Description	Base material and finish	Set/Door opening		For 2 additional doors
			4Z/1.2 m	6Z/1.8 m	
A Top track	Undrilled, also available separately	Anodised aluminium	2 lengths	2 lengths	-
B Top slider	with wood screws for top fixing	White nylon	4 pcs	4 pcs	4 pcs
C Door stop		White nylon	1 pc	1 pc	1 pc
E Bottom guide	with wood screws for top fixing	White nylon	4 pcs	4 pcs	4 pcs
Cat. No.			400.00.000	400.00.001	400.00.010
A Additional top track	Undrilled	Anodised aluminium	400.00.912	400.00.918	

Order 1 set per pair of doors