





Fittings for Straight Sliding Glass Cabinet Doors

EKU Clipo 15GS Infront Door Fittings for Drilled Glass Doors




- **Application:** High quality straight sliding top hung door gear for 4-6 mm thick frameless glass panels for domestic or light duty commercial furniture
- **Range:** Maximum door weight **15 kg**
For glass thickness **4-6 mm**
- Can be used for perspex
- **Glass MUST be drilled**
- Tracks **A** and **B** are for min. **25 mm** thick upper carcase
- Tracks **C**, **D** and **E** are for min. **19 mm** thick upper carcase
- Top track **C** and double track **D** are not suitable for hardwood








Top track groove mounted
No groove in floor
Without fascia
With press-fit running gear





To fasten upper tracks **A/B**, the upper carcase must be min. 25 mm thick

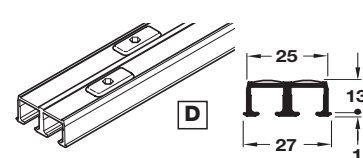

To fasten upper tracks **C/D** the upper carcase must be min. 19 mm thick.
Not suitable for hardwood.



To fasten upper track **E**, the upper carcase must be min. 19 mm thick

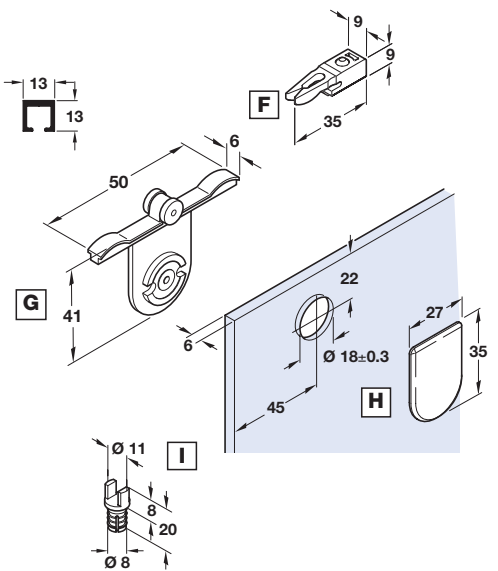

EKU Clipo 15GS Infront tracks and channels

Item	Description	Base material and finish	2.5 m	3.5 m
A Top track	with screw holes for soffit fixing into a groove	Bright aluminium	405.87.013	405.87.022
B Double top track (alternative)	with screw holes for soffit fixing into a groove	Bright aluminium	405.90.010	405.90.020
C Top track	with swivel lug soffit fixing at 100 mm intervals	Bright aluminium	405.86.016	405.86.025
D Double top track (alternative)	with swivel lug soffit fixing at 100 mm intervals	Bright aluminium	405.89.017	405.89.026
E Top track	with screw holes for surface soffit fixing	Anodised aluminium	405.81.010	405.81.020

EKU Clipo 15GS Infront fitting sets and loose fittings

Item	Description	Base material and finish	For 2 doors	Loose fittings
F Track stopper	for top tracks	Grey plastic	4 pcs	405.83.132
G Running gear	press fits into Ø 18 mm hole in glass panel	Anthracite plastic rollers, metal axle	4 pcs	405.83.940
H Cover cap	to clip onto running gear	Satin chrome plastic	4 pcs	405.83.450
I Guide	press-fit, for infront doors	Light grey plastic	2 pcs	405.83.122*
Cat. No.			405.82.260	

Order 1 fitting set per pair of doors or for loose fittings order 2 pcs per door (order 1 pc per door*)