


- Can be installed into either opening edge of door or into the wall
- When door is in open position - light pressure against door edge will release buffer
- Extension force max. 85 N
- Integrated spring pushed door out of the pocket wall at a max. of 85 N, enough to make flush pull accessible
- Magnetic piston end allows door to be held open safely engaging with a small metal plate supplied
- 20 mm stroke
- Fixings included
- Steel


Order qty: 1 pc

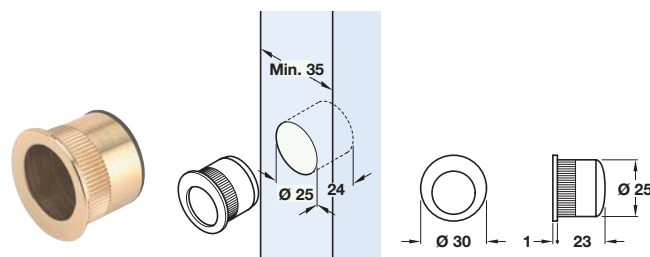

- Push fit into Ø 25 mm hole
- Minimum door thickness 35 mm
- Brass

| Finish | Cat. No. |
|------------------------|------------|
| Polished brass | 901.01.201 |
| Polished chrome-plated | 901.01.202 |

Order qty: 1 pc



- Operation: Push to release
- Light duty
- Fixing screws included
- Brass



| Finish | Cat. No. |
|----------------|------------|
| Satin nickel | 911.26.131 |
| Polished brass | 911.26.130 |

Order qty: 1 pc

Contact the Technical Team today:



Freephone:
0800 171 2908



Online Chat:
www.hafele.co.uk



Email: **technicalsupport@hafele.co.uk**

