

**Current transmitter**


- For current transfer from door frame to door
- Screw terminal for cable
- Contact voltage:  $\leq 24$  V
- Switching current:  $\leq 1.5$  A with electric strike connection (snap action switch)
- On-period/pause-period  $\leq 10$  sec/ $\geq 40$  sec
- Distance between contact blocks  $\leq 5$  mm
- Brass contact pins, white plastic housing

Connection	2-pin	3-pin
Cat. No.	912.02.091	912.02.096

Order qty: 1 pc

5

Architectural Ironmongery: Access Control




**Electro-mechanical contact, flush**


- For recess mounting in wooden door frame
- Operating gap approx. 15 mm
- 4 wire round
- White plastic

	Cat. No.
Contact	912.02.060

Order qty: 1 pc

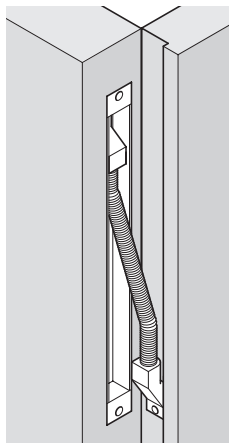

New photo and illustrations


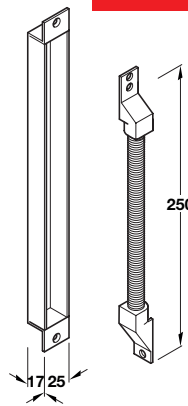


**Door loop, concealed**

- Allows hidden cable run between door and frame
- Concealed from sight within door frame and door
- Distance from hinge pin to door frame  $< 20$  mm
- Max. wire bundle  $\varnothing 6$  mm
- Chrome-plated steel

	Cat. No.
Door loop	912.02.015

Order qty: 1 pc



**Door loop, surface mounted**

- For running cable from door frame to door
- Surface mounted between door and frame
- 300 mm door loop
- 5 mm internal diameter
- 10 mm external diameter
- Stainless steel loop and ends

	Cat. No.
Door loop	912.02.016

Order qty: 1 pc

TCH 2013, © Häfele U.K. Ltd 2013. Dimensional data not binding. We reserve the right to alter specifications without notice.