


Micro electromagnetic lock

- Single door, single swing unit
- Holding force 180 kg
- Always fail unlocked
- Monitored
- Steel armature fixed through door provides secure mounting
- 12V/24V DC
- Current consumption - 630 mA @ 12V, 315 mA @ 24 V
- 5 year warranty
- Aluminium body

Cat. No.	
Micro electromagnetic lock	912.05.060

Order qty: 1 set

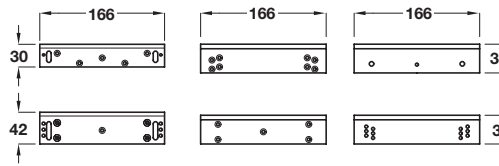


Z and L bracket

- To convert magnet for inswinging doors
- For use with micro electromagnetic lock shown above
- Steel, silver finish

Cat.No.	
Z and L bracket set	912.05.070

Order qty: 1 set

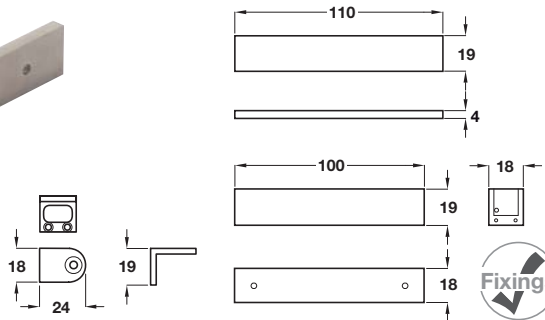

Nano electromagnetic lock

- Mortice pattern
- Suitable for cabinets and other small applications
- Choice of brackets included
- 2 m power cable included
- Holding force: 10 kg @ 6V, 36 kg @ 12V, 42 kg @ 14V
- Always fail unlocked
- Operating voltage 6 to 15V DC
- Hard nickel plated aluminium

Cat.No.	
Nano electromagnet	912.05.090


Order qty: 1 set

Maglock switch and bracket

- For use with nano electromagnetic lock shown above

Cat. No.	
Switch and bracket	912.05.100

Order qty: 1 set

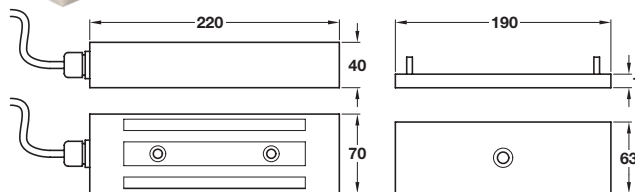

Weather proof electromagnetic lock

- To suit outward opening single swing gates
- Holding force 500 kg
- Always fail unlocked
- 12V/24V DC
- Current consumption 250 mA @ 12V 500 ma @ 24V
- Cable gland and 3 m 3 core cable included
- 5 Year warranty
- Aluminium, brushed stainless steel cover

Unmonitored	
Cat. No.	912.05.065

Order qty: 1 set

TCH 2013. © Häfele U.K. Ltd 2013. Dimensional data not binding. We reserve the right to alter specifications without notice.