



- **Rondorfix** range of knock down fittings:
Housings have eccentric fitting
Bolts are available for direct fixing or with dowel or sleeve, shown below and on page 29

6


Connecting Fittings



Connecting bolt with special thread for direct installation in $\varnothing 5$ mm hole



Connecting bolt with M6 thread for use in dowel or sleeve for push-fit or press-fit fastening in $\varnothing 8$ or $\varnothing 10$ mm hole


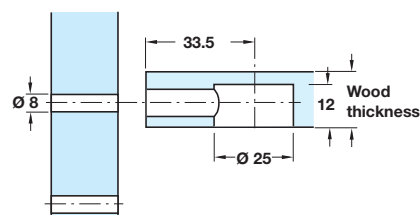


A Rondorfix eccentric housing

- For wood thicknesses from 16 mm
- Without flanged rim, **with bolt recess**
- Zinc alloy

Finish	Cat. No.
Bright	262.75.061

Order qty: Multiples of 100 pcs





B Rondorfix eccentric housing

- For wood thicknesses from 16 mm
- Without flanged rim, **without bolt recess**
- Zinc alloy

Finish	Cat. No.
Bright	262.75.089

Order qty: Multiples of 100 pcs

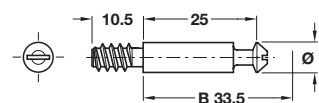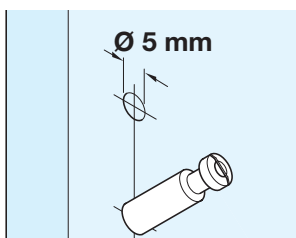

C Rondorfix connecting bolt

- With special thread
- Screws directly into $\varnothing 5$ mm holes
- Steel

Drilling distance B	33.5 mm
Bright	262.75.277

Order qty: Multiples of 100 pcs