



# LID STAYS

## Lid stay

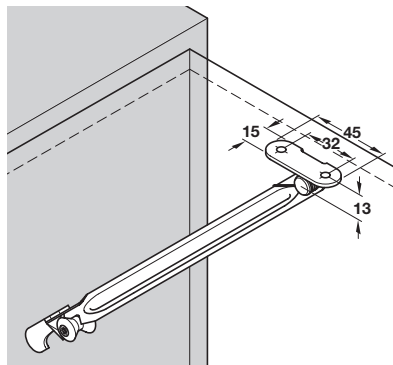

Side panel mounting fixing method




Comes complete with fixing screw

- > With catch
- > Catch is released by lightly raising flap door
- > A single stay is sufficient for lightweight flaps, two stays should be used for heavy or large sized flaps
- > Screw mounting to side panel and lid
- > Left and right handed
- > Nickel-plated steel lid stay
- > Order qty: 1 pc

Length	Flap height	Distance <b>A</b>
150 mm	up to 250 mm	80 mm
200 mm	up to 500 mm	120 mm


Determine distance C by trial mounting

Flap open

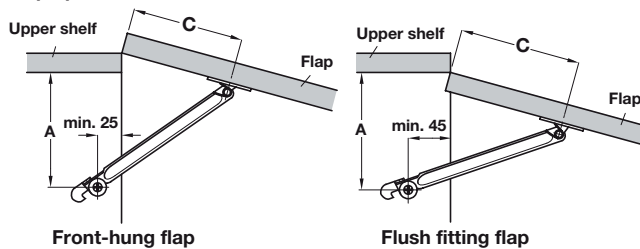

Length	Left	Right
150 mm	-	366.37.706
200 mm	366.37.733	366.37.724


## Lid stay

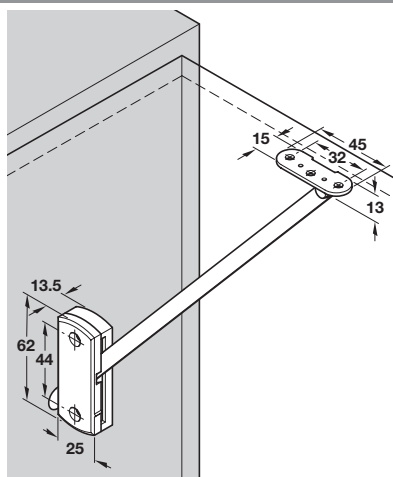

- > With plastic catch housing
- > On raising the flap, the stay will lock into position. Raising the flap further releases the catch allowing it to be closed
- > Screw-mounting to side panel and lid
- > Left and right handed
- > Nickel-plated steel stay with white plastic housing
- > Order qty: 1 pc

Length	Flap height	Flush fitting Dist. <b>A</b>	Front-hung Dist. <b>B</b>
200 mm	up to 500 mm	90 mm	70 mm
250 mm	over 500 mm	120 mm	100 mm

Determine distance C by trial mounting

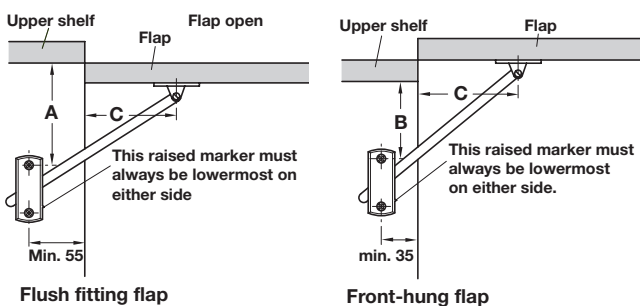

Length	Left	Right
200 mm	373.73.710	373.73.701
250 mm	373.73.738	373.73.729