



IXCONNECT MINIFIX 15 METAL HOUSINGS

ixconnect

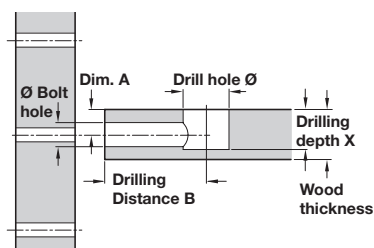

- Drill hole Ø** = Ø 15 mm for housings
Drilling depth X = depends on type of housing and wood thickness (see order columns for details)
Drilling distance B = choice of B 24 (24 mm) or B 34 (34 mm) drilling distance from drill-hole centre to panel front edge
Bolt drill hole Ø = Ø 7 or Ø 8 mm in panel front edge according to choice of connecting bolt


Minifix 15 housing, with rim



- > For wood thickness from 12 mm
- > Drive: PZ2 cross slot or flat blade
- > Zinc alloy
- > Order qty: Multiples of 100 pcs

For wood thickness from	Dim. A	Drilling depth X	Bright	Nickel-plated
12 mm	6.0 mm	9.5 ^{+0.2} mm	262.25.070	262.25.570


Minifix 15 housing, with rim



- > For wood thicknesses from 16, 19 or 29 mm
- > Drive: PZ2, PZ3 cross slot, flat blade or SW4 hexagon socket
- > Zinc alloy
- > Order qty: Multiples of 100 pcs

For wood thickness from	Dim. A	Drilling depth X	Bright	Nickel-plated	Black
16 mm	8.0 mm	12.5 ^{+0.5} mm	262.25.212	262.25.614	-
19 mm	9.5 mm	14.5 ^{+0.5} mm	262.25.221	262.25.623	262.25.829
23 mm	11.5 mm	16.5 ^{+0.5} mm	-	262.25.669	-

Minifix 15 housings, with rim



- > For wood thickness from 34 mm
- > Drive: PZ2 cross slot or flat blade
- > Zinc alloy housing
- > Order qty: Multiples of 100 pcs

For wood thickness from	Dim. A	Drilling depth X	Bright	Nickel-plated
34 mm	17.0 mm	22.5 ^{+0.5} mm	262.25.081	262.25.581



- > Minifix 15 connecting bolts, suitable for these zinc alloy housings are shown on pages **297-305**
- > Red jig for Minifix 12 and 15 housings are shown on **321-324**
- > Unitool drilling jig for Minifix 12 and 15 housings can be found on page **325-326**
- > Variantool-N drilling jig for drilling series-drilled holes for connecting bolts shown on page **322**
- > Minifix 15 cover caps shown on page **296**