



IXCONNECT MINIFIX C100 SPREADING BOLTS

ixconnect

- > For industry, joiners and cabinet makers
- > Connecting bolt for universal use within the Minifix connector system with special benefits:
Extremely installation-friendly, no tools are required
Drilling depth stop ensures ideal bolt position
No surface damage caused by insertion and removal of spreading bolt

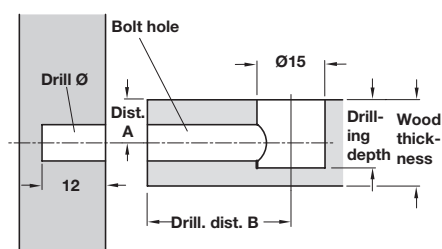


- Bolt hole** = Ø 8 mm
- Drilling depth** = depending on housing type and wood thickness (see table)
- Drill Ø** = Ø 5 mm, Ø 8 mm or Ø 10 mm depending on type of bolt
- Distance A** = 1/2 wood thickness (see Minifix pages 12/15 housings)
- Drilling distance B** = optional between B 24 (24 mm) or B 34 (34 mm), drilling distance from housing centre to front edge

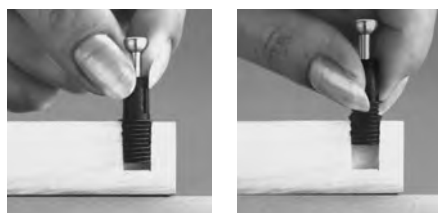


Plug in

Unscrew




Minifix C100 Ø 8 mm spreading bolt



- > For press-fit installation in Ø 8 mm pre-drilled holes
- > For wood thickness from 15 mm
- > Zinc alloy bolt with black plastic spreading dowel with harpoon thread
- > Order qty: Multiples of 100 pcs

Drilling distance B	24 mm	34 mm
Cat. No.	262.09.202	262.09.302

Minifix C100 Ø 10 mm spreading bolt



- > For press-fit installation in Ø 10 mm pre-drilled holes
- > In two parts
- > Zinc alloy bolt with black plastic spreading dowel with harpoon thread
- > Order qty: Multiples of 100 pcs

Drilling distance B	24 mm	34 mm
Cat. No.	262.09.211	262.09.311