


IXCONNECT MINIFIX S100 STANDARD BOLTS




- > **Minifix connecting bolts A:**
With M4 thread are used in conjunction with sleeves or dowels for installation in Ø 5 mm, Ø 8 mm or Ø 10 mm pre-drilled holes
For both single and double-sided constructions
- > **Minifix connecting bolts B:**
With M6 thread are used in conjunction with sleeves or dowels for installation in Ø 8 mm or Ø 10 mm pre-drilled holes
For single-sided constructions

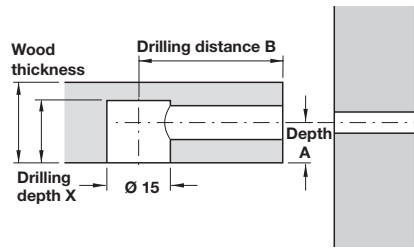

- Cross slot**
Tighten with PZ2 screwdriver only (cross slot size 2)
- Combination slot**
Tighten with PZ2 screwdriver or flat bladed screwdriver

Minifix S100 connecting bolt




- > With M4 thread, for screwing into sleeves or dowels for installation in Ø 5 mm, Ø 8 mm or Ø 10 mm holes
- > Steel
- > Order qty: Multiples of 100 pcs

> Screw in sleeves and dowels with M4 internal thread are shown on page **419**

Drilling distance B	34 mm
Bright	262.28.035

Minifix S100 connecting bolt



- > With M6 thread, for screwing into sleeves or dowels for installation in Ø 8 mm or Ø 10 mm holes
- > Steel
- > Order qty: Multiples of 100 pcs

> Screw in sleeves and dowels with M6 internal thread are shown on page **420**

Drilling distance B	24 mm	34 mm
Thread length 7.5 mm		
Bright	262.27.047	262.28.044
Galvanized	-	262.28.946
Thread length 12 mm		
Bright	-	262.28.041
Galvanized	262.27.941	262.28.941

COMPONENTS, FIXINGS AND CONSUMABLES 2014, © Häfele U.K. Ltd 2014. Dimensional data not binding. We reserve the right to alter specifications without notice.