



IXCONNECT MINIFIX STANDARD S300 BOLTS



- > Minifix S300 bolts:
 - Considerably more robust by increased breaking torque
 - More secure hold in drill hole by increased breaking torque
 - No sagging into drill hole, drilling depth stop ensures ideal bolt position
 - Hollow bolt
- > Minifix connecting bolts **A**:
 - For screw-in installation in Ø 5 mm pre-drilled holes
- > Minifix connecting bolts **B**:
 - With M6 thread are used in conjunction with sleeves or dowels in Ø 8 mm pre-drilled holes

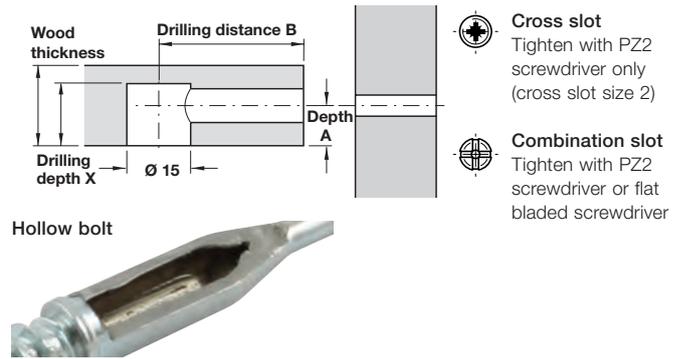

Minifix S300 connecting bolt



- > For screw in installation in Ø 5 mm holes
- > Special thread
- > Galvanized steel
- > Order qty: Multiples of 100 pcs

Drilling distance B	24 mm	34 mm
Cat. No.	262.27.462	262.28.462

Minifix S300 connecting bolt



- > With M6 thread, for screwing into sleeves or dowels for installation in Ø 8 mm holes
- > Galvanized steel
- > Order qty: Multiples of 100 pcs



> Screw in sleeves and dowels with M6 internal thread are shown on page 420

Drilling distance B	24 mm	34 mm
Cat. No.	262.27.471	262.28.471

COMPONENTS, FIXINGS AND CONSUMABLES 2014, © HÄFELE U.K. Ltd 2014. Dimensional data not binding. We reserve the right to alter specifications without notice.