
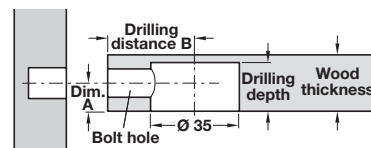


IXCONNECT MAXIFIX UNIVERSAL CONNECTORS

ixconnect


For minimum board thickness of 18 mm.

- > Individual connector to drill in for very strong connections with a high load capacity of wooden components
- > Wide range of applications - e.g. as a worktop connector with double-ended bolt
- > Long tightening distance and rapid tightening with an allen key SW6 or cross slot PZ 3
- > Can be tightened using an electric screw driver (bit allen key SW6 or cross slot PZ3)



- Bolt hole** = Ø 9 mm
Drilling depth = 15.5 mm or 1/2 wood thickness + 6.5 mm
Distance A = 9.5 mm
Drilling distance B = optional between B 35 (35 mm) or B 55 (55 mm), drilling distance from housing centre to panel front edge


Maxifix housing



- > Wide range of applications
- > For wood thicknesses from 19 mm
- > Drilling depth: 15.5 mm or 1/2 wood thickness + 6.5 mm
- > Zinc alloy
- > Order qty: Multiples of 10 pcs

Finish	SW6	PZ3
Bright	262.87.003	262.87.013
Nickel-plated	262.87.703	262.87.713
Nickel-coloured	262.87.603	262.87.613

Maxifix cover cap, plastic



- > For Maxifix housings
- > Plastic
- > Order qty: Multiples of 100 pcs

Colour	Cat. No.
Beige	262.87.490
Brown	262.87.190
Black	262.87.390
White	262.87.790



- > Maxifix connecting bolts, suitable for these zinc alloy housings are shown on page **307**
- > Red jig for Maxifix housings are shown on **321-324**
- > Variantool-N drilling jig for drilling series-drilled holes for connecting bolts shown on page **322**