


Hospa T-star drilling screw, countersunk head



- > Galvanized hardened steel
- > Torque: Internal cross IS
- > Partially threaded screw with drill in tip
- > Screw can be inserted without pre-drilling the panel
- > Countersunk head with routed ribs and T star drive bit

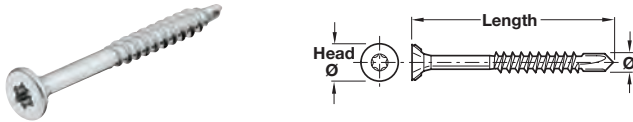

Ø x Length	Head Ø	Driver required	Cat. No.	Order Qty
4.0 x 25 mm	8.0 mm	TS20	019.01.900	1000
4.0 x 30 mm	8.0 mm	TS20	019.01.901	1000
4.0 x 35 mm	8.0 mm	TS20	019.01.902	1000
4.0 x 40 mm	8.0 mm	TS20	019.01.903	500
4.0 x 45 mm	8.0 mm	TS20	019.01.904	500
4.0 x 50 mm	8.0 mm	TS20	019.01.905	500
4.0 x 60 mm	8.0 mm	TS20	019.01.907	500

Carcase assembly screw, funnel head



- > Black steel
- > Fully threaded
- > Funnel head with PZ cross slot, hi-lo thread

Ø x Length	Driver required	Cat. No.	Order Qty
4.0 x 33 mm	PZ2	015.45.301	1000
4.0 x 45 mm	PZ2	015.45.302	1000

> Please order screws in multiples of order quantity shown

Panel mounting screw



- > For Ø 5 mm drilled hole
- > Flat head with PZ cross slot
- > Galvanized steel

Length	Driver required	Cat. No.	Order Qty
13.5 mm	PZ2	013.10.149	200
27.5 mm	PZ2	013.10.283	100

Round-head metal pin



- > Steel



Head Ø x Pin Ø x Length	Cat. No.	Order Qty
Nickel-plated		
1.8 x 0.9 x 11 mm	076.40.217	1x 0.5 kg pack
3.0 x 1.6 x 15 mm	076.40.299	1x 0.5 kg pack
Antique brass		
3.0 x 1.6 x 11 mm	076.40.477	Multiples of 500 pcs
Brass-plated		
3.0 x 1.6 x 15 mm	076.40.191	1x 0.5 kg pack

> Please order screws and pins in multiples of order quantity shown