


# UNIVERSAL FRAME PLUGS

Suitable for: all concrete and brickwork, from perforated bricks to gas concrete and other building materials with a low compression strength



## Universal FUR frame plug

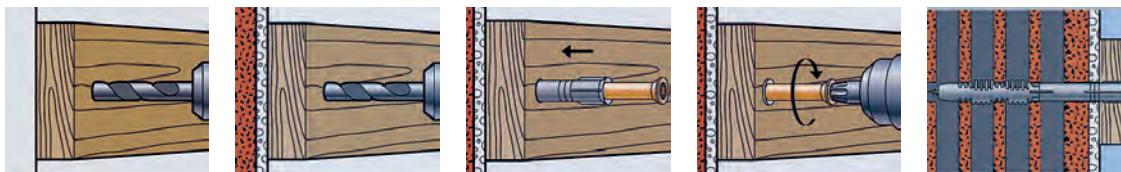

### > Application:

Cladding and facing (wooden subconstruction): Fixing laths, joists, beams and frames, mainly on exterior walls

Facade cladding (metal subconstruction): Fixing metal brackets and rails on exterior walls

Roofs: Fixing laths and planks e.g., on roof edges. Partly the same applications as with facade claddings

Shop windows: Fixing brackets, rails, profiles and frames, both interior and exterior, fire-proof doors

Interior fittings: Fixings laths, beams and joists, metal brackets etc., mainly interior applications

Window fittings (wood, PVC, metal): Fixing brackets and profiles for windows or window-supports

Other building situations: Fixing various objects made of wood, plastic or metal, such as radiator brackets, wall cupboards, wall cable ducts, panel brackets, facing brackets and shelves

> Suitable for: all concrete and brickwork, from perforated bricks to gas concrete and other building materials with a low compression strength

> Grey nylon with galvanized steel safety screw and T-star drive head

> Order qty: Multiples of 50 pcs

Type	Drill Ø	Min. hole depth	Plug length	Screw size	Cat. No.
T-star drive head TS40					
FUR 10x80TS	10 mm	90 mm	80 mm	7 x 85 mm	051.44.004
FUR 10x100TS	10 mm	110 mm	100 mm	7 x 105 mm	051.44.005
FUR 10x135TS	10 mm	145 mm	135 mm	7 x 140 mm	051.44.007
FUR 10x160TS	10 mm	170 mm	160 mm	7 x 165 mm	051.44.008