



**Accuride 0115RC track**



- > Not drilled
- > Can be cut to required length, butted together for infinite lengths, or pinned together using Ø 3 mm pins (not included)
- > Corrosion resistant, dust and dirt repelling
- > Aluminium
- > Order fixing screws separately
- > Order qty: 1 pc

**Drilling pattern**



Front side of track  
 Drill 4.2 mm holes on centre line and countersink to suit screw head.  
 Mount track on solid and level surface. The surface must be suitable for respective load bearing capacity.



Length	Cat. No.
1200 mm	421.59.100
2400 mm	421.59.101


**YOU ALSO NEED:**

**BALL CARRIAGE**  
Shown below

**END STOP**  
Page 225

**OPTIONAL ACCESSORIES**  
Page 225

**Accuride 0115RC ball carriage**

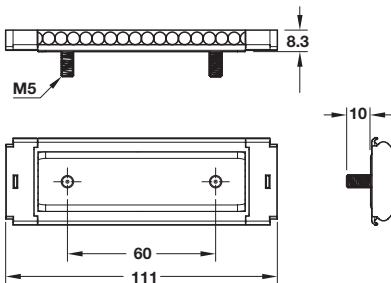


- > Bearing: With stainless steel balls or polymer balls (grease-free and smooth running)
- > Thread: M5
- > M5 hexagon nuts must be ordered separately, Cat. No. 034.16.905 or hexagon locking nuts 034.18.905
- > Order qty: 1 pc
- > **Installation:** The balls are inserted loosely into the re-circulating ball carriage therefore it is supplied packed in a plastic envelope. In order to avoid losing balls during the installation of the re-circulating ball carriage, the plastic envelope must be pressed against the aluminium track and the re-circulating ball carriage must be slid carefully into the aluminium track. Finally install end stops


Bearing	Cat. No.
With stainless steel ball bearing carriage	421.59.801
With polymer ball bearing carriage	421.59.805

DRAWER SYSTEMS, STAYS AND HINGES 2015, © Häfele U.K. Ltd 2015. Dimensional data not binding. We reserve the right to alter specifications without notice.

## Accuride 0115RC end stop



### Installation



Rear side of track


Drill 4.2 mm holes on both track lines and countersink to suit screw head.

- > Aluminium
- > Fitting includes:
  - 1x End stop
  - 2x M4 Countersunk head screws
- > Order qty: 1 pc



End stop	Cat. No. 421.59.500
----------	------------------------

## Accuride 0115RC Soft close mechanism

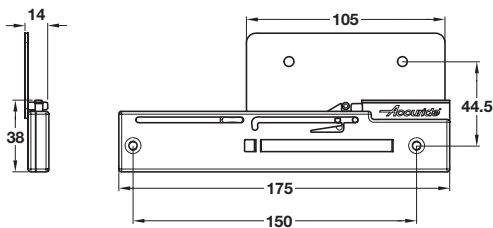

- > Slows down and controls opening/closing of the moving element
- > Pulls in 20 kg load on a single cassette in a horizontally mounted track
- > Pull force 14 N
- > Provides hold-in
- > Plastic/steel
- > Order fixing screws separately
- > Order qty: 1 pc



For use with Accuride 0115RC sliding track system shown on page **224-225**

Finish	Cat. No.
Black	421.59.520