



LID STAYS

Lid stay

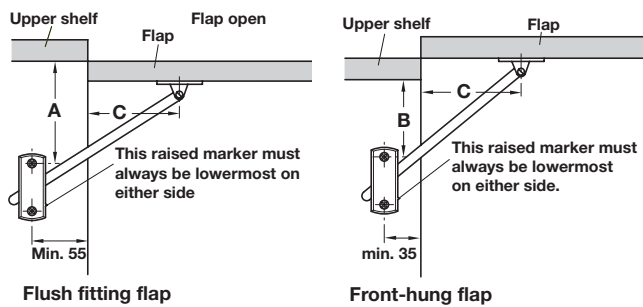

- > With plastic catch housing
- > On raising the flap, the stay will lock into position. Raising the flap further releases the catch allowing it to be closed
- > Screw-mounting to side panel and lid
- > Left and right handed
- > Nickel-plated steel stay with white plastic housing
- > Order fixing screws separately
- > Order qty: 1 pc

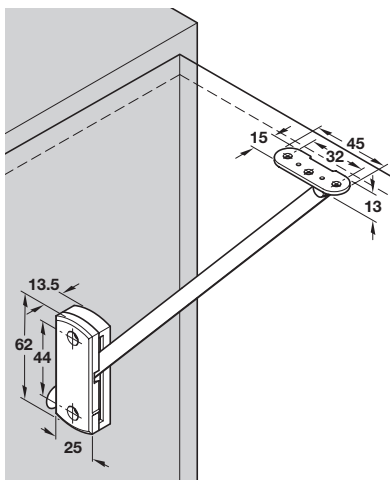

Length	Flap height	Flush fitting Dist. A	Front-hung Dist. B
200 mm	up to 500 mm	90 mm	70 mm
250 mm	over 500 mm	120 mm	100 mm

Determine distance C by trial mounting



Length	Left	Right
200 mm	373.73.710	373.73.701
250 mm	373.73.738	373.73.729