


FLAP HINGE AND CATCH

For door fronts hinged at base.



Flap-Ex flap hinge

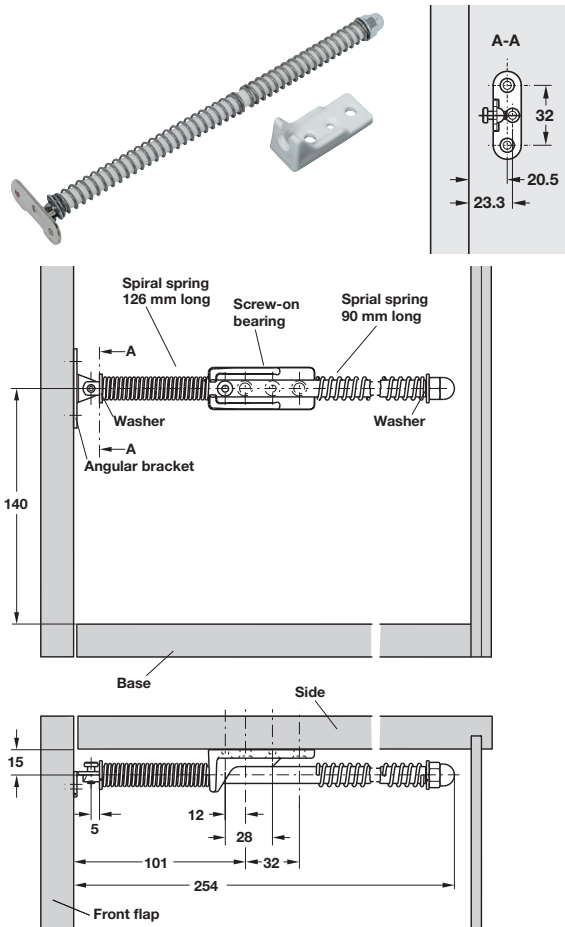

- > Suitable for installation in front flap cabinets min. 820 mm high, min. 400 mm wide with min. installation depth 270 mm
- > Important: Designed to support a chipboard front with maximum dimensions 590 mm high, 400 mm wide, 19 mm thick, maximum weight when full 5 kg
- > Comprises:
 - 1 Angular bracket, screw fixing, nickel plated steel
 - 1 Rod with plastic sleeve
 - 2 Washers
 - 2 Spiral springs: front 126 mm long, rear 90 mm long
 - 1 Bearing, screw fixing, packed loose, white plastic
- > Mounting instructions:
 - Screw fix angular bracket to front panel and bearing to side panel
 - Push rod into bearing between the two spiral springs
- > For installation of the front flap, the following should be ordered separately:
 - 2 cup hinges
 - Mini Latch catch

The door is opened by simply applying pressure to the door itself. When the door is closed, it is secured by the Mini Latch catch
- > Order fixing screws separately
- > Order qty: 1 pc




Cat. No.
Flap-ex flap hinge 365.52.708

YOU ALSO NEED:

CONCEALED CUP HINGES
Page 331

OPTIONAL ACCESSORIES
See below

Mini-Latch automatic spring catch

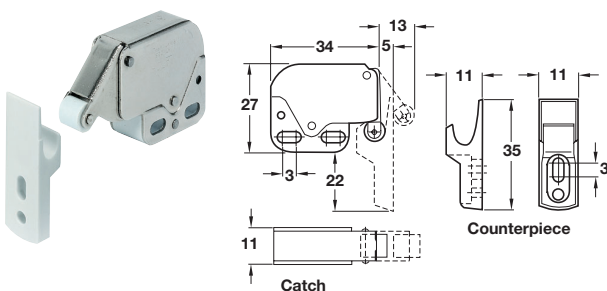

- > Screw fixing
- > Nickel-plated steel catch
- > White plastic counterpiece
- > Order fixing screws separately
- > Order qty: 1 pc



Cat. No.
Automatic spring catch 245.54.701