

# HÄFELE 170° STANDARD HINGES




- > Opening angle 170°, Ø 35 mm cup
- > Screw fixing cup
- > Click on or slide on arm
- > For door thickness up to 24 mm see table below
- > Full overlay mounting steel cup and hinge arm, half overlay mounting steel cup and zinc alloy arm
- > Order fixing screws separately
- > Order qty: 1 pc



Soft close clip on fitting for sprung hinges shown opposite

Drilling pattern for cup fixing




## Häfele 170° hinge

Minimum gap for doors with chamfered edges (r = 1 mm) with factory setting

Door thickness mm	Distance to cup E mm				
	3.0	4.0	5.0	6.0	7.0
16-23	0.0	0.0	0.0	0.0	0.0
24	0.0	0.0	0.0	2.6	5.1
Minimum gap F					

## Full overlay mounting

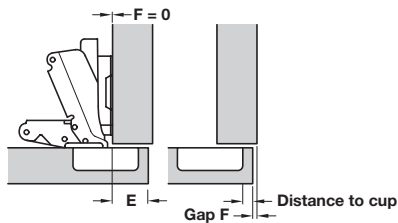

Door overlay mm

13	14	15	16	17	18	19	20	
			3	4	5	6	7	0
3	4	5	6	7				3
Distance to cup E mm					Mounting plate height mm			



Fixing

Click on


Slide on

Screw fixing

312.23.550

312.05.520

## Half overlay mounting

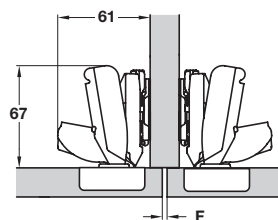


Drawing show application on 0 mm thick mounting plate

Door overlay mm								
4	5	6	7	8	9	10	11	
			3	4	5	6	7	0
3	3	3	3	3				3
Distance to cup E mm					Mounting plate height mm			



Fixing	Click on	Slide on
Screw fixing	312.23.755	312.05.750

## Add on soft close 170°

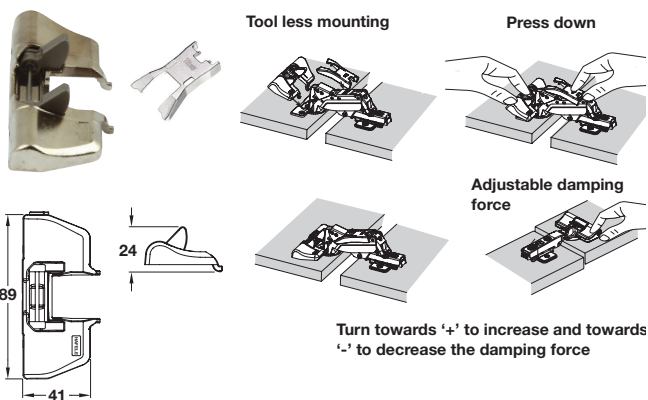

Recommended position of soft close is shown on page 307

- > For use with 170° hinge only
- > Order qty: 1 pc

Opening angle	Cat. No.
170°	312.07.712

## YOU ALSO NEED:




**MOUNTING PLATES**  
Pages 326-329



**FIXING SCREWS**  
Page 468

**OPTIONAL ACCESSORIES**  
Pages 403-417

## Mounting plate for Häfele concealed hinges

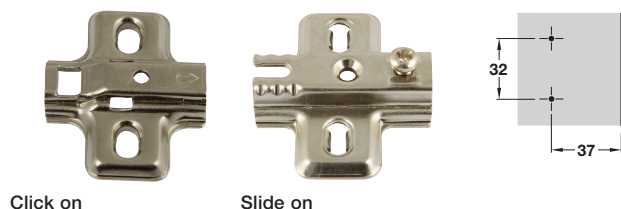

- > Hospa screw fixing
- > One part plate with  $\pm 2$  mm height adjustment via slots
- > Nickel-plated steel
- > Order fixing screws separately
- > Order qty: 1 pc

**BEST  
SELLER**



A wider range of mounting plates are shown on pages 326-329

Height	Click on	Slide on
0 mm	312.30.540	312.10.560

PAGE AMENDED  
19.05.16/2