

TIOMOS 95° SOFT CLOSE HINGES




- > For up to 36 mm thick doors
- > Opening angle 95°, Ø 35 mm cup
- > For door thickness up to 36 mm (for door thicknesses 29 mm and above, a trial fitting is recommended)
- > Up to 24 mm overlay using full overlay plus hinge (see page 337)
- > Available with or without integrated soft close
- > Screw fixing, dowel or Impresso (quick fix) fixing cup
- > Click on arm
- > Full overlay mounting steel cup and hinge arm, half overlay and inset mounting steel cup and zinc alloy arm
- > Order fixing screws separately
- > Order qty: 1 pc


Tiomos 95°

Door thickness mm	Distance to cup E mm				
	3.0	4.0	5.0	6.0	7.0
16	0.2	0.2	0.2	0.2	0.2
18	0.2	0.2	0.2	0.2	0.2
20	0.3	0.3	0.3	0.3	0.3
22	0.5	0.5	0.5	0.5	0.5
24	0.6	0.6	0.6	0.6	0.6
26	1.0	1.0	1.0	1.0	1.0
28	2.0	1.5	1.5	1.3	1.3
30	4.0	3.0	2.5	1.9	2.4
36	10.5	10.0	8.6	7.6	6.7
Minimum gap F					

Drilling pattern for cup fixing

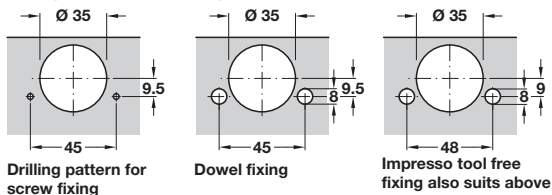


Drilling pattern for screw fixing



Dowel fixing

Impresso tool free fixing also suits above

Full overlay mounting




Door overlay mm							
13	14	15	16	17	18	19	
		3	4	5	6	7	0
3	4	5	6	7			2
Distance to cup E mm				Mounting plate height mm			



Soft close	Screw fixing	Impresso	Dowel
With	348.42.801	348.42.831	348.42.811
Without	348.42.601	-	-

DRAWER SYSTEMS, STAYS AND HINGES 2015, © Häfele U.K. Ltd 2015. Dimensional data not binding. We reserve the right to alter specifications without notice.

Half overlay/twin mounting




Door overlay mm							
6.5	7.5	8.5	9.5	10.5	11.5	12.5	
		3	4	5	6	7	0
3	4	5	6	7			2
Distance to cup E mm				Mounting plate height mm			



Soft close	Screw fixing
With	348.42.802
Without	348.34.602

Inset mounting

Set mounting plate back by door thickness + 1.5 mm




Door gap mm						
	4	3	2	1	0	
				3	4	0
		3	4	5	6	2
Distance to cup E mm				Mounting plate height mm		



Soft close	Screw fixing
With	348.42.803
Without	348.34.603

Full overlay plus



Door overlay mm							
16	17	18	19	20	21	22*	
		3	4	5	6	7	0
3	4	5	6	7			2
Distance to cup E mm				Mounting plate height mm			

*door overlay from 24 mm, use mounting plate 348.38.560



Soft close	Screw fixing
With	348.42.800
Without	348.34.600



YOU ALSO NEED:

MOUNTING PLATES
Pages 364-366

FIXING SCREWS
Page 468

OPTIONAL ACCESSORIES
Pages 367-368, 403-417

Cruciform mounting plate, 4 point fixing



- > For TIOMOS click on fixing hinges only
- > Hospa screw fixing
- > Two part plate with ± 2 mm height adjustment via worm screw
- > Nickel-plated steel
- > Order fixing screws separately
- > Order qty: 1 pc

BEST SELLER



A wider range of mounting plates are shown on pages **364-366**

Height	Hospa screw
0 mm	348.38.511