


# STANDARD 100° HINGES




- > Opening angle 100°
- > Full overlay, half overlay/twin or inset mounting
- > Sprung
- > Ø 35 mm cup
- > For door thickness up to 24 mm see table below
- > Screw fixing or dowel fixing cup
- > Choice of slide on or click on arms
- > Soft close compatible
- > Cup: Nickel-plated pressed steel
- > Arm: Nickel-plated pressed steel
- > Order fixing screws separately for screw fixing versions
- > Order qty: 1 pc

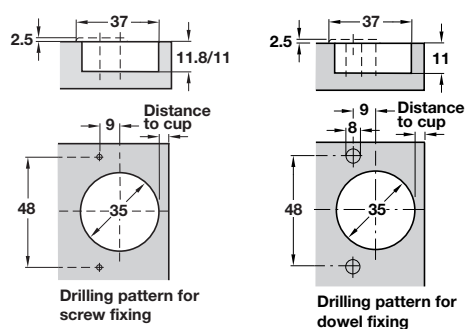

100° Hinge

Door thickness mm	Distance to cup E mm				
	3.0	4.0	5.0	6.0	
16	0.6	0.6	0.6	0.6	
18	0.9	0.9	0.9	0.9	
19	1.1	1.1	1.1	1.1	
20	1.4	1.4	1.4	1.4	
22	1.9	1.9	1.9	1.9	
24	2.5	2.5	2.5	2.5	
Minimum gap					

## Full overlay mounting




Door overlay mm						
14	15	16	17	18	19	
			4	5	6	0
	4	5	5			2
Distance to cup E mm			Mounting plate height mm			



Fixing	Slide on	Click on
Screw fixing	323.40.500	322.15.540
Dowel	-	322.15.590

## Half overlay/twin mounting




Door overlay mm						
6	7	8	9	10	11	
			4	5	6	0
	4	5	6			2
Distance to cup E mm			Mounting plate height mm			



Fixing	Slide on	Click on
Screw fixing	323.40.501	322.15.541

## Inset mounting



Door gap mm			
	0	1	2
	4		2
	6	5	4
Distance to cup E mm	Mounting plate height mm		



Fixing	Slide on	Click on
Screw fixing	323.40.502	322.15.542

YOU ALSO NEED:

**MOUNTING PLATES**  
Pages 394-396


**FIXING SCREWS**  
Page 468

**OPTIONAL ACCESSORIES**  
Pages 397-399, 403-417


## Super compact cruciform mounting plate



Click on



Slide on



- > For Hospa screw fixing
- > Two part plate with external height adjustment
- > Nickel-plated zinc alloy and pressed steel
- > Order fixing screws separately
- > Order qty: Multiples of 10 pcs



Height	Click on	Slide on
0 mm	322.85.750	323.85.701



A wider range of mounting plates are shown on pages **394-396**