


CONCEALED CABINET HANGERS AND FITTINGS

These cabinet hangers are concealed behind the rear panel leaving only the cover caps visible within the wall unit.





Concealed cabinet hanger, press-fit dowels/screw mounting

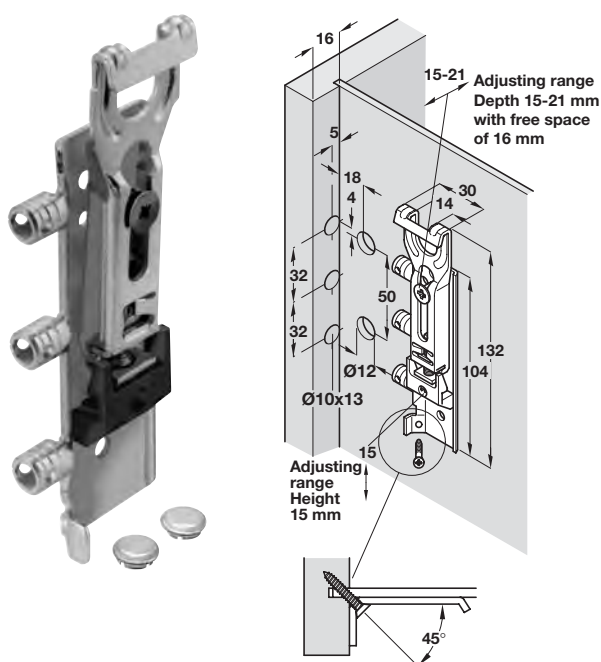

Alternative mounting possibility for extreme loads

Min. 2x Hospa countersunk screw 3.5 x 30 mm
The screw must be seated on the wall plug

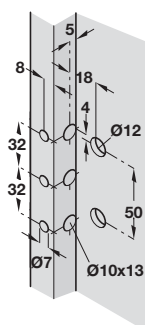

Cabinet hangers should only be adjusted with a hand tool and not a power tool

- > Cabinet hanger concealed behind rear panel, only cover caps visible inside the cabinet
- > Min. space required behind rear panel: 16 mm
- > Handed
- > Load carrying capacity 130 kg per pair
- > Three-way adjustment:
 - Vertical adjustment 15 mm
 - Depth adjustment max. up to 21 mm (depending on free space behind rear panel)
 - Lateral adjustment with hooks approx. 8 mm, with suspension rail up to 16 mm
- > Steel with RAL 9010 white plastic trim caps
- > Order qty: 1 pc (order 1 left and 1 right hand pc)



Wall plate or rail must be ordered separately, shown on page 189



For safety reasons, the cabinet hangers must be fitted in the upper third of the cabinet

Finish	Left	Right
Galvanized/white	290.03.921	290.03.920