


## WORKTOP SUPPORT BRACKETS

Designed to allow space beneath a worktop, these brackets are especially useful for where wheelchairs are required.

### Worktop support bracket




- > Overall measurements (W x D x H) = 55 x 500.5 x 410 mm
- > Total recommended max. load capacity for two brackets is 300 kg, for three brackets 450 kg, provided adequate fixings are used
- > Mounting strip included, with two elongated 5 x 15 mm holes for adjustment and one countersunk Ø 5 mm hole for final fixing
- > Bracket support pin and circlip included
- > The bracket has a 400 mm leg with a grub screw near the bottom which allows the bracket to be levelled to the wall, using an allen key (order allen key separately, Cat. No. 008.28.250)
- > The mounting strip has holes only at the top part restricting the position in which the bracket can be hung. This prevents the bracket fouling the worktop.
- > Satin anodised aluminium mounting strip, cream-white epoxy coated steel bracket
- > Order qty: 1 pc

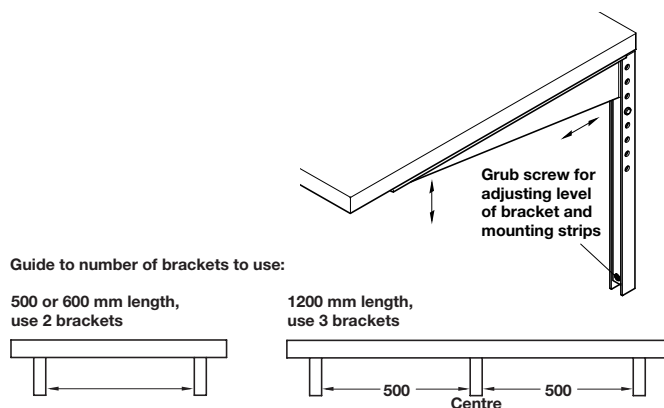

	Cat. No.
Worktop support bracket	287.52.420

### Ropox worktop bracket

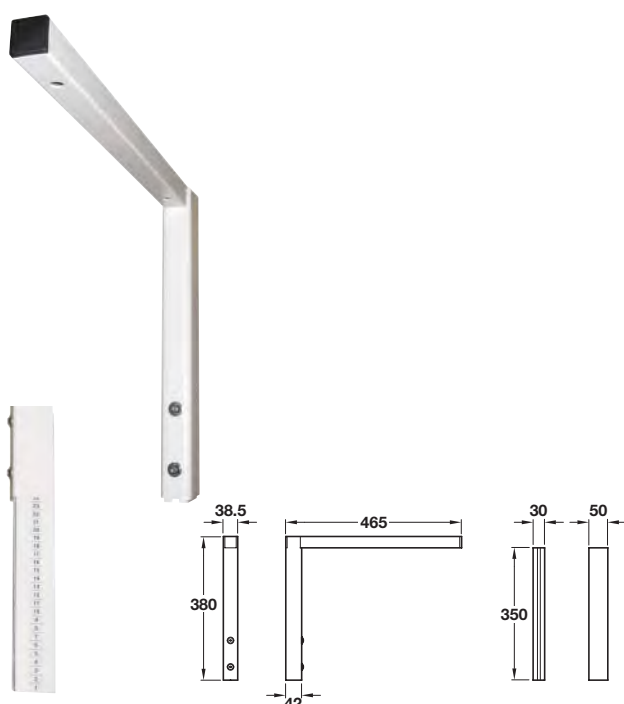

- > Manual suspension system offers simple and efficient mounting of worktops
- > 230 mm infinitely adjustable upward and downward
- > White painted steel worktop bracket with aluminium wall bracket
- > Consists of:
  - 1x worktop bracket
  - 1x wall fixing bracket
- > Order qty: 1 set

Finish	Cat. No.
White painted steel	506.16.790