



LOOX 24V LED 3001 DOWNLIGHT

Recess mounting downlight, with optional bezel for surface mounting.

24V SYSTEM

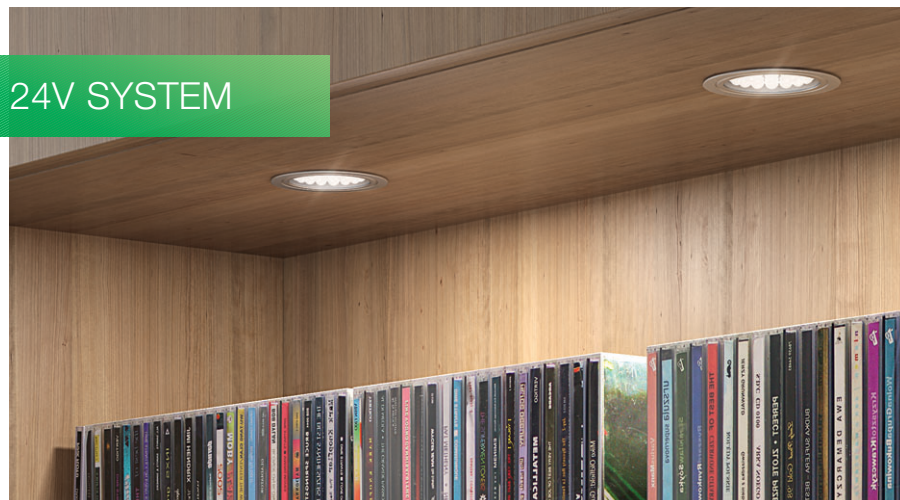

Loox 24V LED 3001 downlight, Ø 65 mm



Distance	55°	3000 K	5000 K
250 mm		1900 Lx	2000 Lx
500 mm		490 Lx	500 Lx
750 mm		220 Lx	230 Lx
1000 mm		150 Lx	160 Lx

833.75.010 REPLACED BY **833.75.016**
833.75.000 REPLACED BY **833.75.006**



Order bezels separately for surface mounting, shown below

- > For recess mounting, press-fit in Ø 55 mm hole
- > Voltage: 24V. Wattage: 1.7W
- > With 2.5 m lead with Loox 24V connector
- > Aluminium, with prismatic cover
- > Order qty: 1 pc or set

**EASY
TO ORDER
SETS**

Output:	3000 K	5000 K
Light colour:	Warm white	Cool white
Wattage (W):	1.7	1.7
Energy efficiency:	A+	A+
Number of diodes:	24	24
Light output (Lm):	90	100
Efficacy (Lm/W):	53	59
Colour Rendering Index:	82	90



Individual light	3000 K	5000 K
Silver coloured anodised	833.75.016	833.75.006
Set includes lights, 1x driver, mains lead and bezels		
Packed set with 2 lights included	-	833.75.004
Packed set with 3 lights included	-	833.75.005

Loox 24V LED 3001 bezel, Ø 68 mm



- > For surface mounting Loox LED 3001 downlight
- > Screw fixing
- > Aluminium
- > Order qty: 1 pc



Finish	Cat. No.
Silver coloured anodised	833.77.710

YOU ALSO NEED:



DRIVER
Page 126



SWITCH
Pages 128-131

OPTIONAL ACCESSORIES
Pages 127, 133-135

PAGE AMENDED
14.10.16/2