TUSK lever handles, grade 316 stainless steel



- Pair of lever handles on roses
- Grub screw fixing on 8 mm spindle
- Unsprung, for use on heavy duty followers
- To suit doors 35-54 mm thick
- Grade 316 stainless steel
- Order qty: 1 pair

Satin st. steel | Polished st. steel

Piercing spindle | Fixings included

Finish	Cat. No.
Satin stainless steel	902.21.620
Polished stainless steel	902.21.621

DUNE lever handles, brass

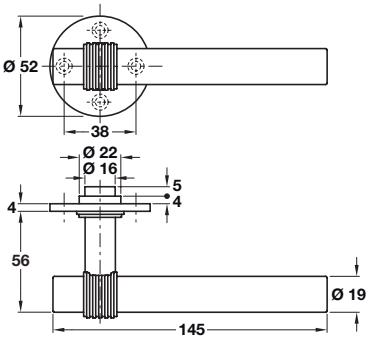

- Pair of lever handles on roses
- Grub screw fixing on 8 mm spindle
- Unsprung, for use on heavy duty followers
- To suit doors 35-54 mm thick
- Brass
- Order qty: 1 pair

Satin st. steel | Polished st. steel

Piercing spindle | Fixings included

Finish	Cat. No.
Satin stainless steel	902.21.770
Polished stainless steel	902.21.771

> Co-ordinating escutcheons and WC/emergency release also available see pages **10-11**
> Co-ordinating pull handles are shown on pages **131** and **160**

TCH AH 2016, © Häfele U.K. Ltd 2016. Dimensional data not binding. We reserve the right to alter specifications without notice.