


Ø 20 mm lever handles, aluminium



- > Pair of lever handles on concealed fixing roses
- > Grub screw fixing on 8 mm spindle
- > Sprung, for use with standard duty followers
- > To suit doors 35-54 mm thick
- > Aluminium
- > Order qty: 1 pair

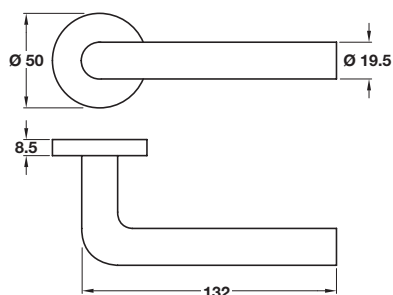


Finish

Satin anodised aluminium

Cat. No.

904.20.961

Ø 20 mm safety lever handles, aluminium

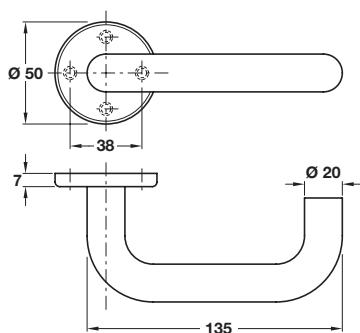

- > Pair of lever handles and roses
- > Grub screw fixing on 8 mm spindle
- > Sprung for use with standard duty followers
- > To suit doors 35-44 mm thick
- > Aluminium
- > Order qty: 1 pair



Finish

Satin anodised aluminium

Cat. No.

904.21.501



- > Co-ordinating escutcheons and WC/emergency release also available see page 79
- > Co-ordinating levers on back plates are shown on page 105