HAWA-DORADO INFRONT SLIDING DOOR SYSTEM


Sliding door system for top quality joinery and furniture.


- > HAWA-Dorado Infront
- > Range:

Max. door weight 40 kg


Door thickness 19-25 mm

- > Running gear with back fixing plate. For door weights up to 40 kg. Vertically adjustable ± 3 mm. Two white plastic friction bearing mounted tandem runner assemblies
- > Top track surface mounted
- For multiple door layouts, order as follows:
 4 doors: 2 sets of 2 door fittings
 5 doors: 1 set each 2 and 3 door fittings
- Each fitting set comes complete with installation drawing ref. 17659, available separately on request

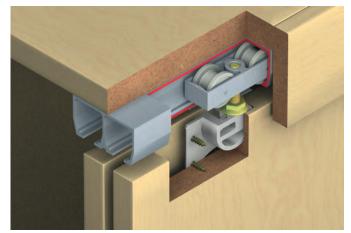







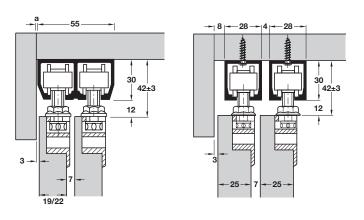

Door thickness	19 mm	22 mm	25 mm
Dim. a	1.5 mm	6 mm	-
Dim. b	5 mm	8 mm	11 mm






TOH AH 2016, © Häfele U.K. Ltd 2016. Dimensional data not binding. We reserve the right to alter specifications without notice.

Tracks, profiles and fitting sets must be ordered separately, shown on page 15



HAWA-Dorado Infront top tracks






- - Track B: For 23 mm or thicker doors 2 tracks should be installed side by side

- > Order tracks separately, surface mounted
- A Double top track, pre-drilled for screw mounting, silver anodised aluminium
- B HAWA-Junior 40 single top track, alternative to top track A, silver anodised aluminium
- A/I Standard set, top track A and profile I packed together in standard sets
- > Order qty: 1 pc

Item	2.5 m	3.0 m	3.5 m
A Double top track	406.71.912	-	406.71.921
B Single top track	-	940.40.300	-
Item		1.5 m	2.5 m
A/I Standard set		406.71.010	406.71.038

HAWA-Dorado Infront fitting sets for 2 or 3 doors













> HAWA soft closing system, is shown on pages 12-13

- > Fitting set consists of:
- C Trolley hanger, left/right hand, for inner or outer doors, screw fixing, adjustable, nickel-plated zinc alloy
- D Track stopper, for inner and outer doors, adjustable steel spring and retainer 18 x 84 x 21 mm, bright zinc alloy
- E Allen key, for use to secure track stopper E in twin track, steel
- F Twin guide, for inner and outer doors, screw mounted in recess in cupboard floor, \varnothing 35 mm, brown plastic
- G Single guide, for inner doors, screw mounted in recess in cupboard floor, Ø 35 mm brown plastic
- H Rubber buffer, \varnothing 15 mm recess mounted in edge of door in Ø 10 mm hole, light grey rubber
- > Order qty: 1 set

Item	For 2 doors	For 3 doors
C Trolley hanger, right hand	2 pcs	3 pcs
C Trolley hanger, left hand	2 pcs	3 pcs
D Track stopper	4 pcs	4 pcs
E Allen key	1 pc	1 pc
F Twin guide	1 pc	1 pc
G Single guide	-	1 pc
H Rubber buffer	2 pcs	2 pcs
Cat. No.	406.70.120	406.70.139
Additional items	Order qty.	Cat. No.
F Replacement twin guide	1 pc	406.70.920
G Replacement single guide	1 pc	406.70.921

HAWA-Dorado lower guide profile



- > Press fit, groove mounted in door
- > Brown plastic
- > Order qty: 1 pc (Order 1 pc per door)

Length	3.0 m
I Lower guide profile	406.73.103

HAWA-Dorado alternative bottom guide



Bottom guide J does not require lower profile I

- > For where a more robust guide is preferred
- > Black plastic
- > Order qty: 1 pc (Order 1 pc per door)

Item	Cat. No.
J Bottom guide	940.40.031