


Accuride 1316 synchronised control system



> Profile rod must be ordered separately, shown below

- > Comprises:
 - 2x rod guides, white plastic
 - 2x toothed rails, galvanized steel/white plastic
 - 2x pinions with screw mounts, white plastic
 - Mounting screws, M4 x 25 mm
- > To be used with Accuride 1319 system shown on pages **140-141**
- > Order qty: 1 set (per door)

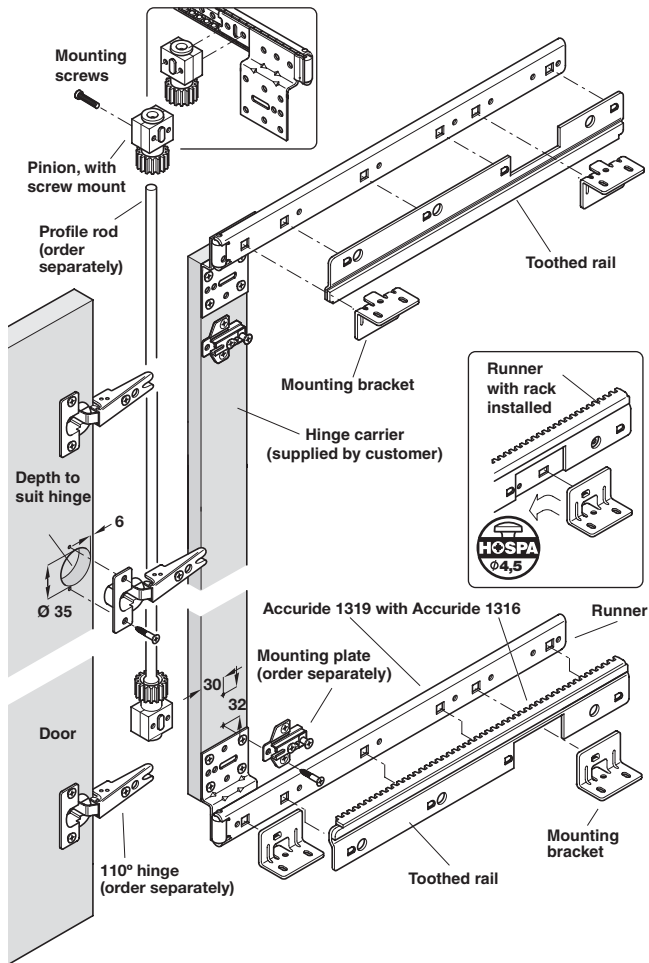

Suitable for installed length A	Cat. No.
350 mm	408.05.356
400 mm	408.05.409
450 mm	408.05.454
500 mm	408.05.507
550 mm	408.05.552
600 mm	408.05.605


Profile rod



- > Standard lengths of 2 or 2.5 m
- > Length of profiled rod: Internal cupboard height less 63 mm
- > Polished nickel-plated drawn steel
- > Order qty: 1 pc (per door)

Length	Max. door height	Cat. No.
2000 mm	1800 mm	226.67.205
2500 mm	2300 mm	226.67.250

Cover cap, for Ø 35 mm hole



- > To cover access hole for hinge arm adjustment
- > Plastic
- > Order qty: Multiples of 100 pcs

Finish	Cat. No.
White	340.40.700
Brown	340.40.100