
EKU-CLIPO 16 H INSLIDE SLIDING DOOR SYSTEM

High quality straight sliding top hung cupboard door gear for domestic or light-duty commercial furniture. Optional soft closing which is conceal mounted in the running track. Running gear is simply clipped in during installation.

- > EKU-CLIPO 16 H Inslide
- > Range:

Maximum door weight 16 kg For door thickness 16 or 19 mm


- > Fittings are supplied in sets for 2 doors
- > Choice of types of top track installations
- > Height adjustment +2/-1 mm on running gear







Tracks and fitting sets must be ordered separately, shown on page 39






Choice of mounting for single top track in groove: Screw fixing or by swivel lug.








15 |10 | 15 |10 |-












19 Door thickness 16 mm



EKU-CLIPO soft close set for two doors




- > Min. door width 260 mm for when using 1 soft close
- > Min. door width 480 mm for when using 2 soft close
- > Set includes 2 soft close mechanisms and 2 stoppers
- > Grey plastic
- > Order qty: 1 set (Order 2 sets for soft close at each end of a two door set



For 2 doors 405.10.070 Soft close




EKU-CLIPO 16 H Inslide top tracks











- A Top track, for gluing into groove, bright aluminium
- B Top track, swivel lug soffit fixing at 100 mm intervals, for min. 19 mm wood thickness, not suitable for hardwood/MDF, bright aluminium
- C Top track, with screw holes, for soffit fixing into a groove, for min. 30 mm wood thickness, bright aluminium
- > Order qty: 1 pc

Length	2.5 m	3.5 m
A Top track, glue fixing	405.87.052	405.87.053
B Top track, swivel lug fixing	405.87.062	405.87.063
C Top track, screw fixing	405.87.072	405.87.073

EKU-CLIPO top track end caps








- > End caps for top track
- D End cap, swivel lug fixing (not for hardwood/MDF), grey plastic
- E End cap, screw fixing, grey plastic
- > Order qty: 1 pc

Item	Cat. No.
D End cap, swivel lug fixing	405.83.180
E End cap, screw fixing	405.83.181

EKU-CLIPO 16 double top tracks







- F Double top track, groove mounted, screw fixing, silver anodised aluminium
- G Double top track, surface mounted, screw fixing, silver anodised aluminium




Fixings

1

> Order qty: 1 pc

Length	2.5 m	3.5 m
F Double top track, groove mounted	405.90.032	405.90.033
G Double top track, surface mounted	405.90.942	405.90.943


EKU-CLIPO 16 H Inslide fitting set for two doors

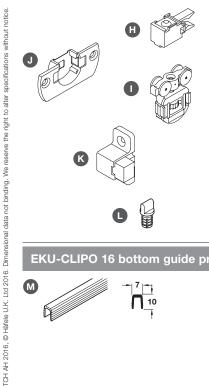

- > Fitting set includes:
- H Track stopper for top tracks, grey plastic
- I Running gear clip on, height adjustable +2, -1 mm, black plastic rollers, metal axle
- J Housing screw fixing, for use with running gear I, grey plastic
- K Door follower, grey plastic
- L Guide, press-fit in Ø 8 mm hole, black plastic
- > Order atv: 1 set

Fitting set	For 2 doors
H Track stopper	4 pcs
I Running gear	4 pcs
J Housing	4 pcs
K Door follower	1 pc
L Guide	2 pcs
Cat. No.	405.82.216

EKU-CLIPO 16 bottom guide profile



- > Ribbed for press-fit installation
- > For use with guide L
- > Anthracite plastic
- > Order qty: 1 pc

Length	2.5 m	3.5 m	
I Bottom guide profile	405.98.516	405.98.525	

PAGE AMENDED