EKU-LIBRA 20 H SYNCHRO SLIDING DOOR SYSTEM

For two b-parting vertical synchronised action sliding timber doors, inset or overlay. No counterweight is required as the second door acts as a counterweight.

- > EKU-LIBRA 20 H Synchro
- > Range:


Max. door panel weight 20 kg


Min. door thickness 16 mm

Max. door height 1000 mm

Max. door width 1600 mm


> No counterweight is required as the second door acts as a counterweight.








Tracks and cover profiles must be ordered

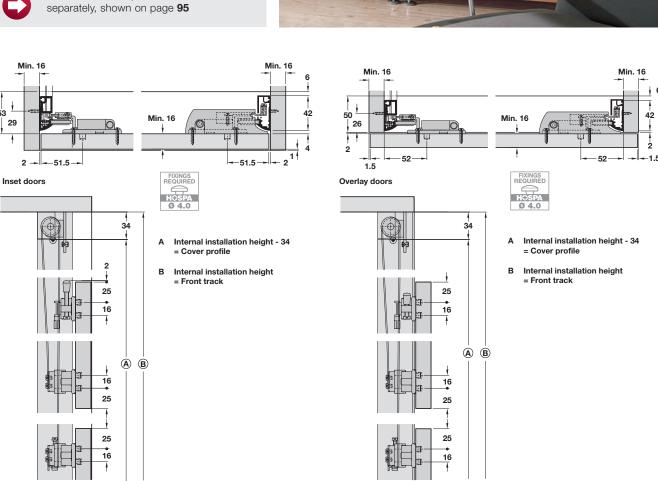

TCH AH



EKU Libra 20H Synchro tracks and profiles






- > Front tracks and cover profile must be ordered separately
- A Front track, surface mounted, with screw holes for front side fixing, anodised aluminium
- B Cover profile, clips on to front track, anodised aluminium
- > Order qty: 1 pc


Item	2.5 m
A Front track	403.21.925
B Cover profile	403.22.925

EKU Libra 20H Synchro fitting sets




Right hand running gear adjustable using SW4 allen key










TCH AH 2016, @ Häfele U.K. Ltd 2016. Dimensional data not binding. We reserve the right to alter specifications without notice.







- > Fitting set consists of:
- C Running gear, used at top and bottom of unit, left hand with retaining spring, right hand adjustable using SW4 allen key, plug in and screw fix to door panel, with black rubber door buffer and plastic roller with metal axle, anthracite grey plastic
- D Top bracket, screw fixes to top running gear and guides cord, silver chromatized steel
- E Bottom bracket, screw fixes to bottom running gear and guides cord, silver chromatized steel
- F Locking pin, secures cord to bottom bracket, steel
- G Cord, blue kevlar
- H Running gear covers, clip on, anthracite grey plastic
- I Cover plates, clip on, anthracite grey plastic
- J Cord front guides, slots into track A, secured using SW3 allen key, yellow chromatized steel, plastic
- > Order qty: 1 set

Item	For 2 doors
C Running gear	4 pairs
D Top bracket	4 pcs
E Bottom bracket	4 pcs
F Locking pin	4 pcs
G Cord	4 pcs
H Running gear covers	4 pairs
I Cover plates	2 pairs
J Cord front guides	1 pair
Cat. No.	403.20.010