


## Threshold seal, severe rating




- > Suitable for hinged doors, opening in
- > Suitability: Commercial and public buildings, residential, severe exposure, normal site conditions, wheelchair and trolleys, domestic vehicle
- > Complies with regulation M (Part T- Scotland)
- > Easy fit, no notching
- > Fitting tolerance 6 mm
- > Ends protected by weather deflecting end caps
- > Unique thermal break prevents cold transfer
- > Aluminium with EPDM seals
- > Order qty: 1 pc

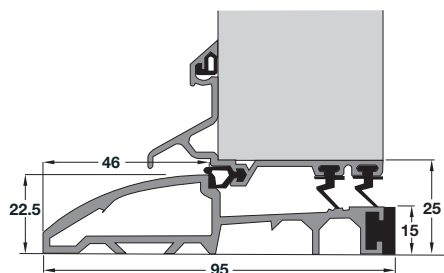

Length	914 mm
Cat. No.	950.17.211

## Threshold seal, normal rating

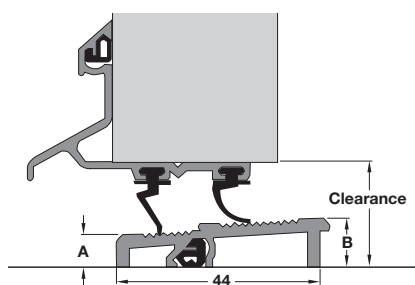

- > Suitable for hinged doors, opening in and out
- > Suitability: Industrial, commercial and public buildings, residential, normal site conditions, wheelchair and trolleys, domestic vehicle
- > Complies with regulation M
- > Fitting tolerance 4 mm
- > No seal underfoot to be damaged
- > No gutter to collect water or dirt
- > Ends protected by weather deflecting end caps
- > Aluminium with EPDM seals
- > Order qty: 1 pc



Clearance	Dim. A x B	914 mm	1828 mm
20mm	6 x 9.5 mm	-	950.17.222
25mm	11 x 14.5 mm	950.17.231	-

## Threshold plate, heavy duty



- > Low profile
- > Use in conjunction with retractable door bottom seals
- > Aluminium
- > Order qty: 1 pc

Length	2 m
Cat. No.	950.14.172