

## Stainless steel rising butt hinge, 100 x 77 mm




Clockwise closing =

Left hand hinge

Anti-clockwise closing =

Right hand hinge



- > Handed - specify clockwise or anti clockwise closing
- > Maximum adjusted door weight 60 kg
- > Minimum door thickness 29 mm
- > Concealed cams when closed
- > Door closes on release
- > Rises 16 mm at 180°
- > Grade 304 stainless steel
- > Order qty: 1 pc



Closing direction	Satin
Clockwise closing	980.15.000
Anti-clockwise closing	980.15.010



Only 2 hinges per door leaf are required

## Stainless steel falling butt hinge, 100 x 77 mm




Clockwise closing =

Left hand hinge

Anti-clockwise closing =

Right hand hinge



- > Handed - specify clockwise or anti clockwise closing
- > Maximum opening angle 120°
- > Maximum adjusted door weight 50 kg
- > Minimum door thickness 29 mm
- > Concealed cams when open
- > Door opens on release
- > Falls 10.5 mm at 120°
- > Grade 304 stainless steel
- > Order qty: 1 pc



Closing direction	Satin
Clockwise closing	980.15.020
Anti-clockwise closing	980.15.030



Only 2 hinges per door leaf are required

## Glass door lift off hinge, 100 x 44/76 mm




Clockwise closing =

Left hand hinge

Anti-clockwise closing =

Right hand hinge

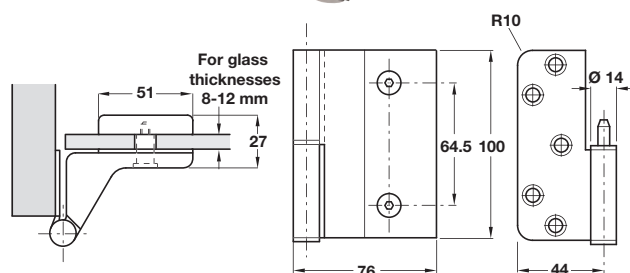

- > Handed - specify clockwise or anti-clockwise closing
- > Maximum adjusted door weight 60 kg
- > For glass door thickness 8 to 12 mm
- > 2x Ø 15 mm holes required at 64.5 mm centres
- > Ideal for partitioning systems
- > Maintenance free
- > Not recommended for shower doors
- > Frame leaf; steel, door leaf; aluminium
- > Order qty: 1 pc



Closing direction	Simulated satin stainless steel
Clockwise closing	926.88.090
Anti-clockwise closing	926.88.091