




Tectus TE 340 3D FR hinge

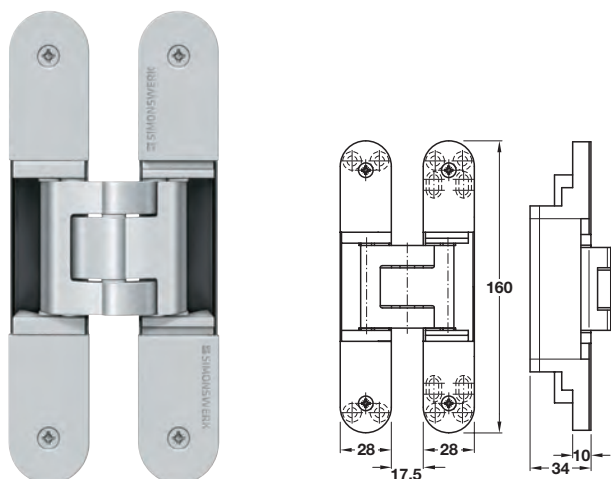

Installation



to wooden block frames



with receiver to steel frames




- > Maximum adjusted door weight 80 kg
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1.0 mm
- > With integrated intumescent kit
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 30 mm
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc




Finish	Cat. No.
Satin stainless steel	924.19.040
Matt chrome	924.19.042
Matt nickel	924.19.047
Matt black	924.19.043
Bronze	924.19.041


Tectus TE 540 3D FR hinge

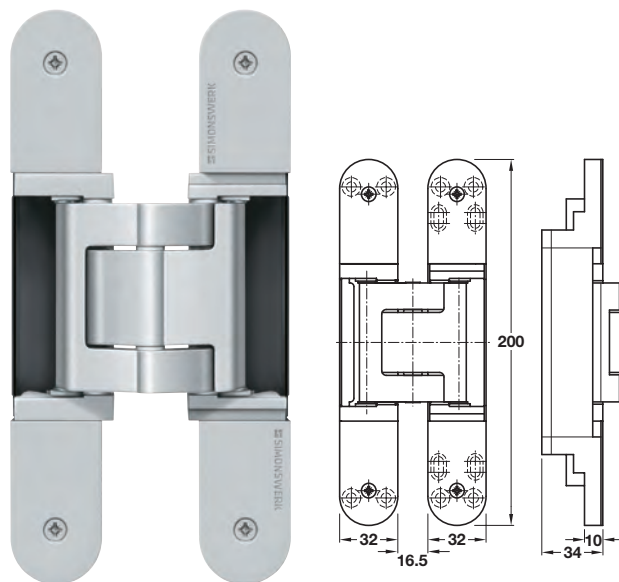

Installation



to wooden block frames



with receiver to steel frames



- > Maximum adjusted door weight 120 kg
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1.0 mm
- > With integrated intumescent kit
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 40 mm
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc



Finish	Cat. No.
Satin stainless steel	924.19.050
Matt chrome	924.19.052
Matt nickel	924.19.057
Matt black	924.19.053
Bronze	924.19.051