

Geze TS 2000V and TS 2000 VBC overhead door closer



- > Power size 2-5
- > Max. door width 1250 mm
- > Adjustable closing speed and latch action
- > TS 2000 VBC with backcheck
- > Fig. 1, Fig. 61 and Fig. 66 application
- > Approved CF 252 certifiere
- > Cast aluminium body
- > Order qty: 1 pc


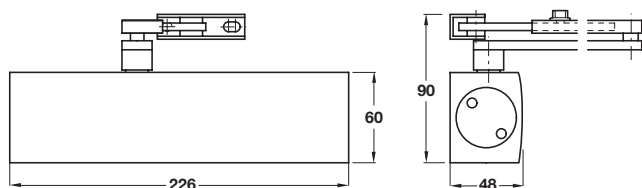


Fig 1 Standard application
(door leaf installation)
Closer is fixed to the
pull side of the door




Fig 61 Transom application
(overhead installation)
Closer is fixed to the
push side of the door





Fig 66 Parallel arm
application: Closer is fixed
to the push side of the door
using fixing bracket



Silver
Satin
st. steel

BS EN 1154

4 8 3-5 1 1 4




Finish	TS 2000 V	TS 2000 VBC
Backcheck	without	with
Silver	940.13.706	940.25.106
Satin stainless steel	931.16.100	-

Geze TS 2000/4000 hold open arm



- > To suit all TS 2000 and 4000 closers
- > Converts standard closer to hold open engageable/disengageable
- > Steel
- > Order qty: 1 pc

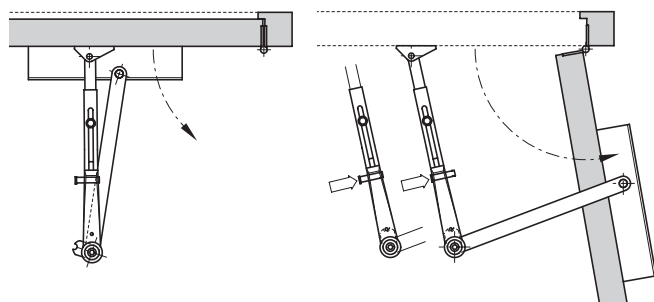

Not to be used on fire doors

Finish	Cat. No.
Silver	940.01.975



RAL colours and copper finishes are also available to order on request - please contact us for further information