

# DIALOCK WT 210 WALL TERMINAL

For indoor and outdoor use. For controlling car park barriers, gates, any type of door, furniture and furnishings, lights, alarm systems and video surveillance

## Dialock WT 210 offline wall terminal, Mifare Classic technology



- > WT 210 wall terminal (reader unit and controller in one compact unit). The compact design allows for installation in flush mounted boxes or cavity wall boxes
- > Mains-operated wall terminal, for offline operation
- > Forms a complete offline access point in combination with an electric strike
- > The digital input port can be used for connecting a push button inside that activates the electric strike, for example
- > With integrated real-time clock for programming time restricted locking authorisations (setting of time zones)
- > With sabotage sensor that triggers the integrated signal generator and activates the alarm relay when removing the reader head from the installation frame
- > The alarm relay can also be combined with one further relay (in the protected (indoor) areas) in order to achieve a tamperresistant access point
- > With audit trail of all locking processes and processes of removing the reader head from the installation frame
- > Wireless firmware update with the MDU 110
- > Technical information:  
Ambient temperature (operation): -25 °C to +70 °C  
Relative humidity: 10-95 % (not condensed)  
Voltage supply: 12-24 V DC ±15%  
Current consumption: 0.8 W  
RFID: f = 13.56 MHz  
Indication: 1x LED red, 1x LED green, Piezo sound generator  
Interface: Digital input port - Switching input max. 20 mA. Relay output port (changeover contact) - 48 V AC/DC, 5 A  
Alarm output port (make contact) - 48 V DC, 1 A Rf interface for configuration with MDU 110  
Memory: For up to 1000 audit trail entries, for up to 1000 keys  
Terminals: 0.13-0.52 mm<sup>2</sup>
- > Anthracite/silver coloured plastic
- > Order qty: 1 pc

**IP65**


Height x Width x Depth

81 x 81 x 13 mm

Cat. No.

917.91.077

## Small distributor box

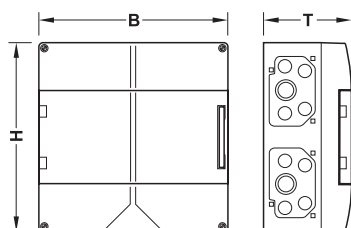

- > For installation of safety transformer, automatic circuit breaker, installation control relay and electronic control module
- > With hat rail (917.91.024 shown on page 161), IP 65 with door, IP 30 without door
- > Grey plastic housing
- > Order qty: 1 pc

**IP30**
**IP65**

Item

Size (W x D x H)

Cat. No.

### Degree of protection - IP65

14 joint units (single row)	300 x 142 x 300 mm	910.51.988
28 joint units (double row)	300 x 142 x 450 mm	910.51.989

### Degree of protection - IP30

12 joint units (single row)	305 x 99 x 250 mm	910.51.986
24 joint units (double row)	305 x 99 x 375 mm	910.51.987



For help, advice and ordering of our full range of Dialock access control systems please get in touch with our Project Team, 0800 171 2907 or [estimating@hafele.co.uk](mailto:estimating@hafele.co.uk)