


Wall box, for flush mounting




- > Dims according to DIN standard
- > Black plastic
- > Order qty: 1 pc



Depth
63 mm

Cat. No.
917.91.029

Wall box, for cavity wall mounting




- > 61 mm depth, for Ø 68 mm milled hole
- > For standard combination distances of 71 mm
- > For plate thickness 7-35 mm
- > With retaining edge
- > Dims according to DIN standard
- > Orange plastic
- > Order qty: 1 pc

Depth
61 mm

Cat. No.
917.91.012

Flush mounted box

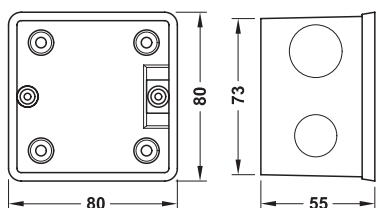


- > For energy control terminal shown on page 160
- > White plastic
- > Order qty: 1 pc

For flush mounting

Cat. No.
917.91.000


Cavity wall box

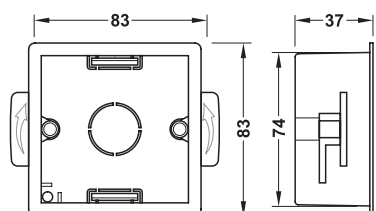

- > For energy control terminal shown on page 160
- > For panel thickness 7-35 mm
- > White plastic
- > Order qty: 1 pc

Item	Cat. No.
Cavity wall box	917.91.031
Counterunk head screw, 3.5 x 25 mm	917.91.028

Hat rail

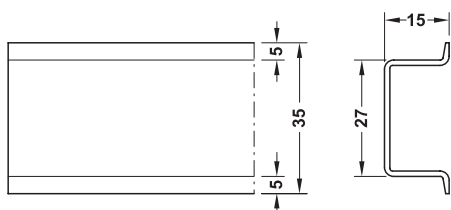

- > Standard: In compliance with EN 50 022
- > Yellow chromated steel
- > 2000 mm length
- > Order qty: 1 pc

Cat. No.
Hat rail 917.91.024



For help, advice and ordering of our full range of Dialock access control systems please get in touch with our Project Team, 0800 171 2907 or estimating@hafele.co.uk