


Standard electromagnetic lock




- > Single door, single swing unit
- > Holding force 545 kg
- > Always fail unlocked
- > Door status monitor (DSM) - Unmonitored
- > LED indicator on underside of monitored version
- > Steel armature fixed through door provides secure mounting
- > 12V/24V DC
- > Current consumption - 500 mA @ 12V, 250 mA @ 24V
- > Aluminium body
- > Order qty: 1 pc

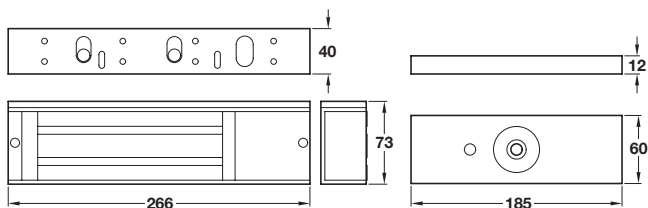

Option
Unmonitored

Cat. No.
912.05.001

'Z' and 'L' brackets

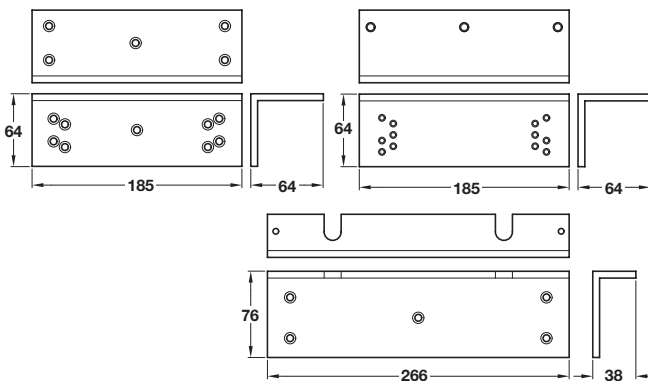


- > To convert magnet for inswinging doors
- > To suit standard electromagnetic lock shown above
- > Steel, silver finish
- > Order qty: 1 set

Z and L brackets set

Cat.No.
912.05.021

'L' bracket

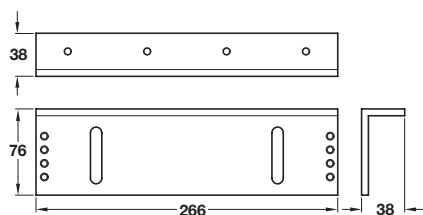

- > For doors without overhead reveal
- > To suit standard electromagnetic lock shown above
- > Steel, silver finish
- > Order qty: 1 pc

L bracket

Cat.No.
912.05.020