


## Mortice cylinder slave unit



- > Shoot bolt operated by lever handles. Deadlock by cylinder
- > Case: Steel, BZP CR3 passivate, 14.5 mm thick
- > Front plate: Square, 1 piece. Steel, BZP CR3 passivate. 2120 mm (including shoot bolts) x 16 mm wide. Front plate can be shortened by max. 130 mm top and bottom
- > Keeps: Not included, order separately
- > Follower: 8 mm brass. For use with standard 92 mm unsprung lever handles
- > Corrosion resistance: Plated to BS EN 1670 Grade 4
- > Designed to meet the requirements of PAS 23 and PAS 24
- > Order fixing screws separately
- > Order qty: 1 pc

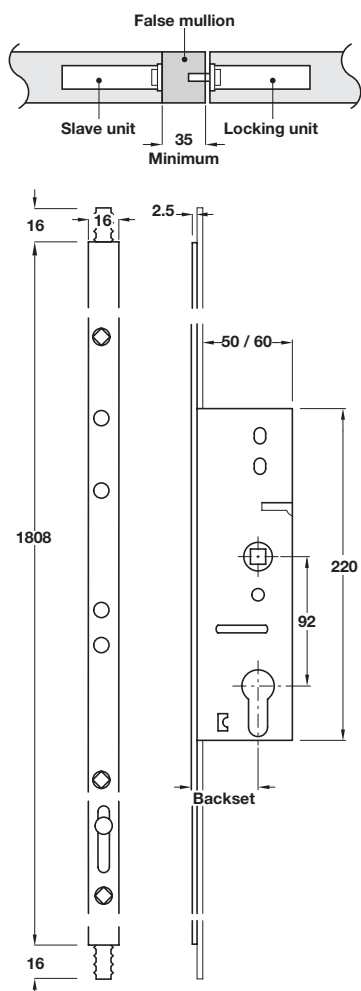

	Length with shoot bolts added	
	Minimum	Maximum
Backset 35/45 mm		
1810 x 16 mm	1740 mm	2120 mm



Front plate width: 16 mm	Cat. No.
Backset 35 mm	911.50.790
Backset 45 mm	911.50.791



- > Keeps are shown on pages **45-46**. Order cylinders separately, see pages **65-77**
- > Optional shoot bolt engagement for additional security available, shown on page **47**
- > Multipoint lock standrd 92 mm unsprung lever handles are shown in **Section 1** on pages **106-110**



All moving parts should be lightly lubricated using a light non-acidic mineral oil (eg. "3 in 1"), twice per year and surface cleaned with a soft damp cloth. The locks may need to be adjusted and fixings tightened to ensure a satisfactory operation

PAGE AMENDED  
21.07.16/1