


Multi-point repair lock, 2 hook



- > High security 2 hook for composite and timber applications
- > Designed to meet the requirements of PAS 24
- > Non-handed lock mechanism with reversible sash bolt and snib facility as standard
- > Accepts standard 92 mm unsprung handles
- > Split spindle for lever/pad applications
- > Bi-directional throw of locking features - enhanced anti jemmy feature
- > High security hook for anti-separation resistance - 10 mm engagement into keeps
- > Precision adjustable rollers for enhanced performance and weathersealing
- > Each kit is modular based, comprising of a 3 piece set:
 - Central gearbox - 45 mm backset; for euro profile cylinder
 - Croppable top and bottom extension pieces
 - Fixings and illustrated instructions for installation
- > Bright zinc-plated steel
- > Order qty: 1 pc

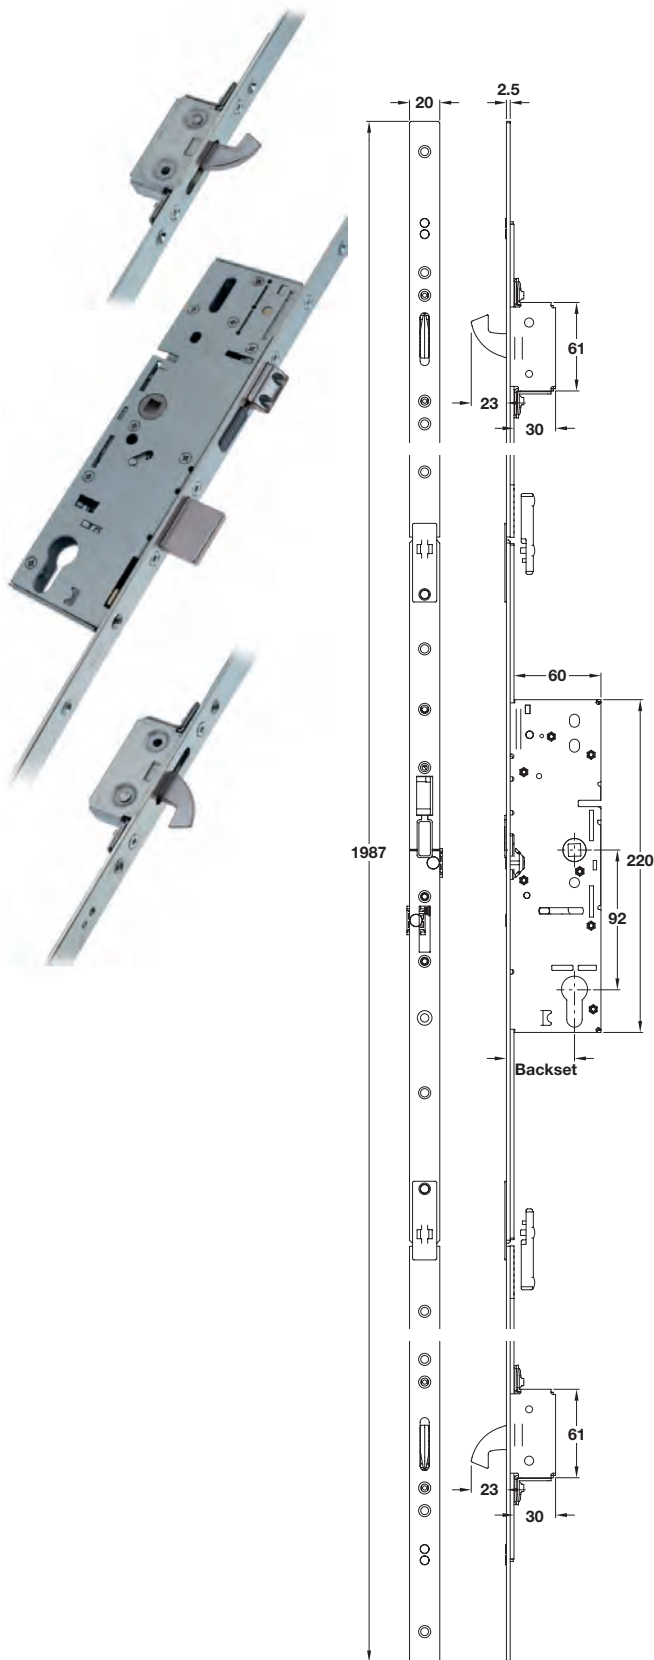

Front plate length x width

Cat. No.

Backset 45 mm

1987 x 20 mm

911.50.778

> Order cylinders separately, see pages **65-77**> Multipoint lock standrd 92 mm unsprung lever handles are shown in **Section 1** on pages **106-110**

All moving parts should be lightly lubricated using a light non-acidic mineral oil (eg. "3 in 1"), twice per year and surface cleaned with a soft damp cloth. The locks may need to be adjusted and fixings tightened to ensure a satisfactory operation