


## Multi-point repair lock, 2 hook 2 mushroom



- > Secure 2 roller 2 mushroom for PVCu applications
- > Non-handed lock mechanism with reversible sash bolt and snib facility as standard
- > Accepts standard 92 mm unsprung handles
- > Split spindle for lever/pad applications
- > Bi-directional throw of locking features - enhanced anti jemmy feature
- > Precision adjustable rollers for enhanced performance and weathersealing
- > Each kit is modular based, comprising of a 3 piece set:  
Central gearbox - 35 mm backset; for euro profile cylinder  
Croppable top and bottom extension pieces  
Fixings and illustrated instructions for installation
- > Bright zinc-plated steel
- > Order qty: 1 pc

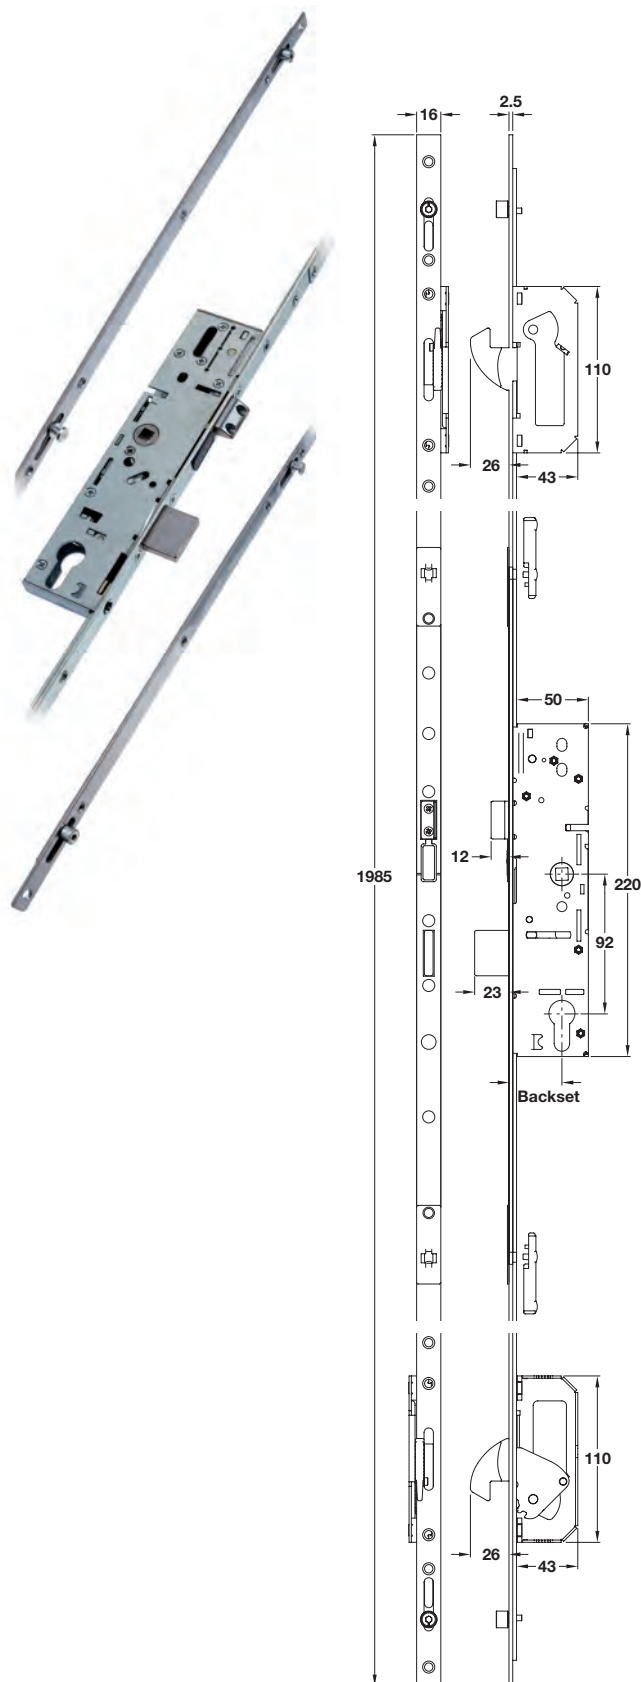

Front plate length x width

Cat. No.

**Backset 35 mm**

1985 x 16 mm

911.50.779



- > Order cylinders separately, see pages **65-77**
- > Multipoint lock standrd 92 mm unsprung lever handles are shown in **Section 1** on pages **106-110**



All moving parts should be lightly lubricated using a light non-acidic mineral oil (eg. "3 in 1"), twice per year and surface cleaned with a soft damp cloth. The locks may need to be adjusted and fixings tightened to ensure a satisfactory operation